




The MAXSET Bow Roller design guarantees that MAXSET stainless steel and galvanised anchors, along with similar competitor versions, are efficiently self-launched during anchor deployment. When the anchor is fully retrieved, the MAXSET bow roller ensures that the anchor fits securely into the roller and will not rattle around when the boat is under way.

MAXSET BOW ROLLERS

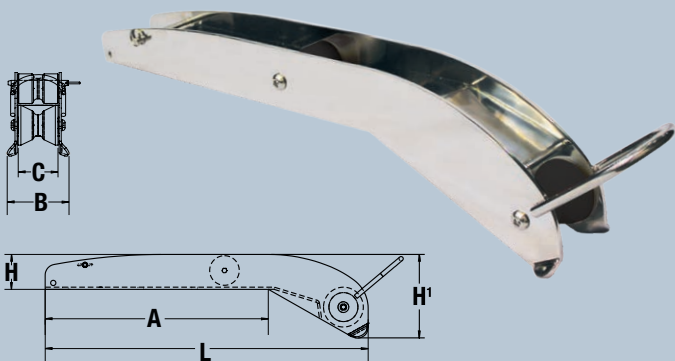

MAXSET ANCHORS AND MAXSET BOW ROLLERS

		Polished Finish				
MAXSET (Delta Style Anchors)	MAXSET Bow Roller Codes	P105075	P105077	P105079	P105081	P105083
	4kg/9lbs		•			
6kg/13lbs		•				
10kg/22lbs			•			
16kg/35lbs				•		
20kg/44lbs					•	
25kg/55lbs						•
30kg/66lbs						•
40kg/88lbs						•



EXTENDABLE HINGED BOW ROLLER



FIXED BOW ROLLER WITH ANCHOR LOOP



SHORT EXTENSION POSITION

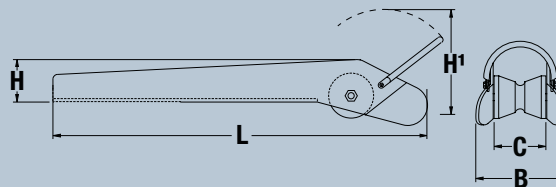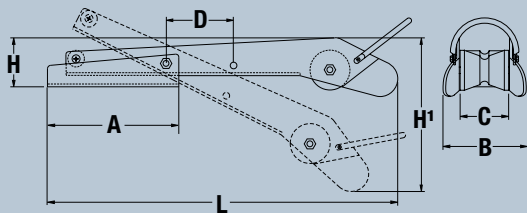

MAXSET ANCHORS AND BOW ROLLERS

Standard Bow Roller Codes	P104331	P104332	P104333	P104334	P104340	P104345
MAXSET (Delta Style Anchors)						
4 kg/9 lbs		•	•		•	•
6 kg/13 lbs		•	•		•	•
10 kg/22 lbs	•	•	•		•	•
16 kg/35 lbs		•	•	•	•	•
20 kg/44 lbs				•		
25 kg/55 lbs				•		
Standard Bow Roller Codes	P104331	P104332	P104333	P104334	P104340	P104345
MAXCLAW (Claw Style Anchors)						
5 kg/11 lbs		•	•		•	
8 kg/18 lbs		•	•		•	•
10 kg/22 lbs	•	•	•	•	•	•
15 kg/33 lbs				•	•	•
20 kg/44 lbs				•		

MAXSET AND STANDARD BOW ROLLER DIMENSIONS

	Extendable P104340	Fixed with Hoop P104345	P105074 P105075	P105076 P105077	P105078 P105079	P105080 P105081	P105082 P105083
A	198 mm (7 13/16")	N/A	315 mm (12 3/8")	414 mm (16 5/16")	480 mm (18 7/8")	510 mm (20")	560 mm (22")
B	125 mm (4 15/16")	134 mm (5 1/4")	84 mm (3 5/16")	112 mm (4 3/8")	112 mm (4 3/8")	114 mm (4 1/2")	153 mm (6")
C	73 mm (2 7/8")	75 mm (3")	62 mm (2 1/2")	78 mm (3")	78 mm (3")	78 mm (3")	105 mm (4 1/8")
D	101 mm (4")	N/A	N/A	N/A	N/A	N/A	N/A
H	75 mm (2 15/16")	65 mm (2 9/16")	55 mm (2 1/8")	65 mm (2 1/2")	72 mm (2 13/16")	78 mm (3")	95 mm (3 3/4")
H'	239 mm (9 3/8")	155 mm (6 1/8")	122 mm (4 13/16")	152 mm (6")	165 mm (6 1/2")	175 mm (6 7/8")	215 mm (8 1/2")
L	527 mm (20 1/4")	460 mm (18 1/8")	465 mm (18 5/16")	600 mm (23 5/8")	715 mm (28 1/8")	762 mm (30")	850 mm (33 1/2")