



RTX-49F

Dakota Digital RTX Instrument Installation
For 1949-'50 Ford Car

Your new RTX-49F kit includes:

RTX Display



Buzzer



Installation Manuals



Switch Assembly



Universal Sender Pack



Ford Adapter



Main Harness


Control Box

Installation


1. Remove the stock cluster from the dash and be sure to retain all hardware for reassembly.



2. Remove the protective tape from the clear lens.

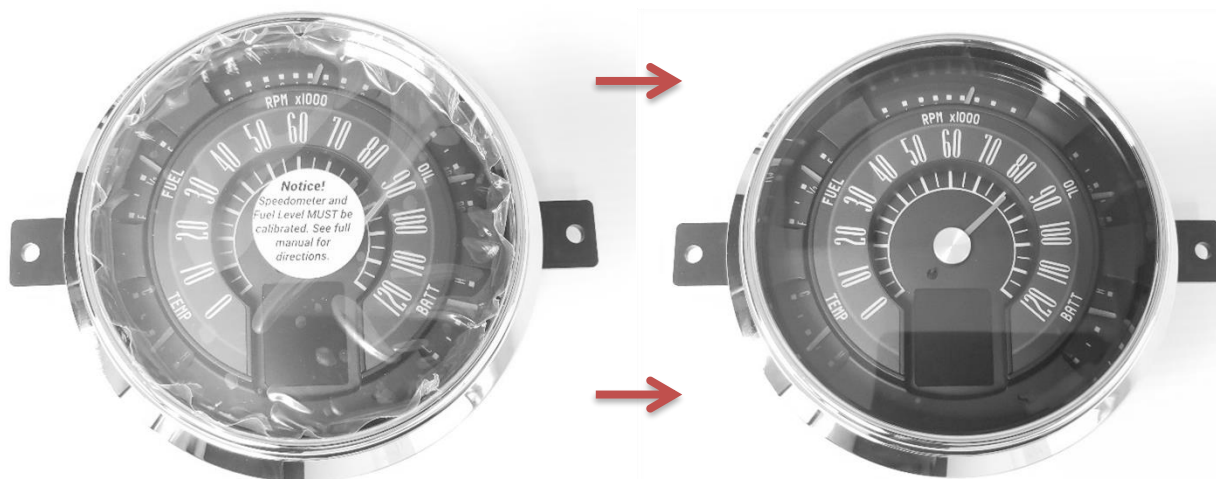

3. Connect the provided 36" main harness and buzzer (optional for audio feedback) to the back of the RTX system. Route the other end of the main harness to the control box.

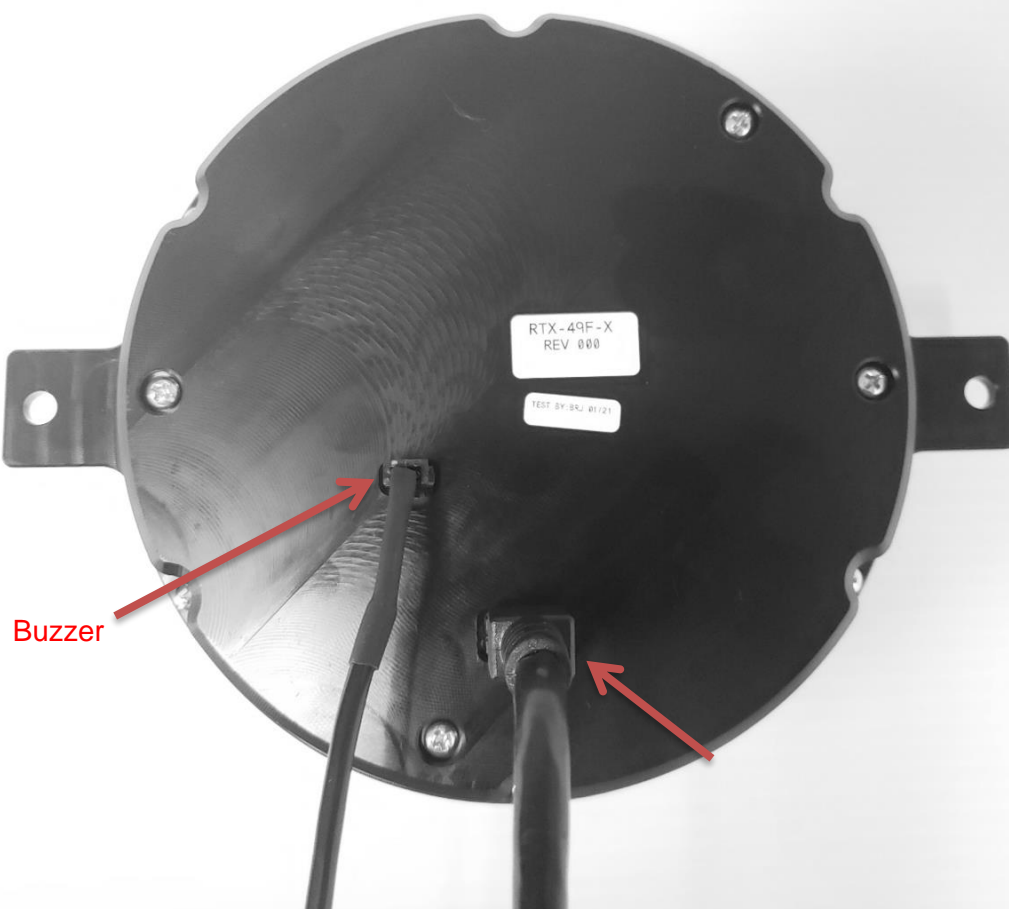

4. Re-install the cluster into the vehicle using stock hardware and refer to the main manual for wiring instructions to complete the RTX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2021 - Dakota Digital