




PROTECTING THE NATURAL BEAUTY OF WOOD

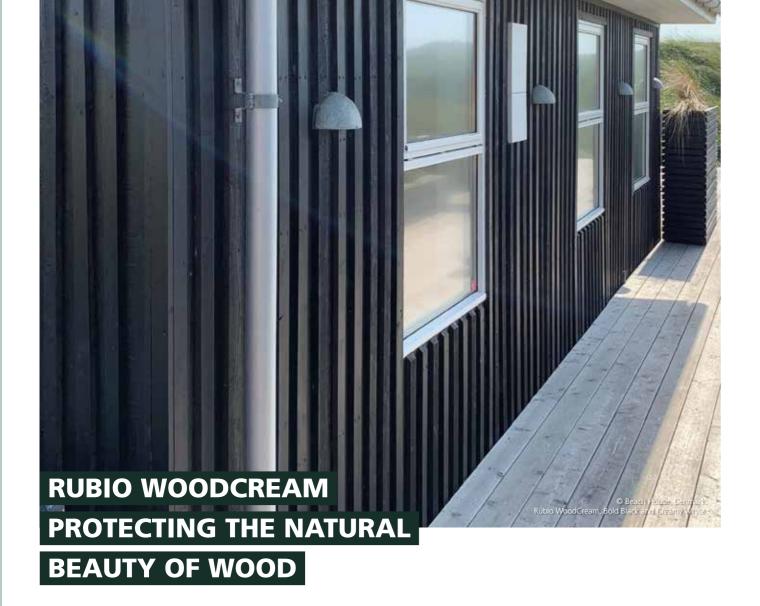

Outdoors, it's vital to treat wooden surfaces with the right product. After all, you want the wood to look good for a long time. **Rubio WoodCream** is based on **hydrophobic technology** especially developed for maximum wood protection. Its unique and active **self-cleaning** formula intensely nourishes the wood, preserves the **breathable** structure, and makes it **water-repellent**. And the beauty of it all: the wax cream comes in a wide range of colours and brushes smoothly. A joy to work with and a feast for the eyes!

Unique characteristics

- > Wax-based cream
- Nourishing
- » Breathable
- Water-repellent
- > Self-cleaning



Consult the technical data sheet in this brochure for more information.



INNOVATIVE TECHNOLOGY WITH UNIQUE BENEFITS


The hydrophobic Rubio WoodCream technology in combination with its unique cream structure offers both on product as on application level important benefits.






WAX-BASED CREAM

The **cream structure** of Rubio WoodCream not only guarantees **ease of application**, but it also ensures a long contact time with the wood. This gives the wood time to optimally absorb Rubio WoodCream, without covering the wood pores. Rubio WoodCream can be applied in one layer, or for a more covering result, in several layers, without changing these unique properties. The unique structure also guarantees **very low consumption**.




NOURISHING

Rubio WoodCream not only colours and protects the wood, but also nourishes it. The cream penetrates deep into the wood and ensures that the surface remains **vapour permeable**. The cream **doesn't contain fillers** and doesn't form a sealing layer on the wood as other paint products and lacquers do. Rubio WoodCream **will not flake off** and therefore guarantees a **much longer lifespan** of the wood.




BREATHABLE

Wood must be able to breathe to maintain its beauty. Our hydrophobic cream ensures that the **wood pores remain open** and **moisture regulation is retained**. As a result, water is repelled, and air and water vapour can still pass through. The **natural look & feel** of the wood is also preserved.



WATER-REPELLENT

The capillary force of the wood fibres, the force that attracts water, is converted into a water-repellent force because of the hydrophobic character of Rubio WoodCream. This results in a **long-lasting pearl effect** which gives the wood a **very durable protection** against extreme weather conditions.



SELF-CLEANING

The pearl effect provides **100% protection against water**, and at the same time creates a self-cleaning effect. Water droplets slide off the wood, removing dirt particles from the surface. The water-repellent and self-cleaning effect **reduces the risk of micro-organism growth** (algae, molds, fungi) and prevents frost damage.

Rubio **WoodCream** 1 3

PACKAGING & TOOLS

The right packaging for every project



RUBIO WOODCREAM

Available in the following packaging: Can: 100 ml - 1 L - 2,5 L - 5 L - 20 L



RUBIO WOODCREAM SOFTENER

Available in the following packaging:

Plastic bottle: 100 ml - 1L

Jerrycan: 5 L

Easy-to-use tools



RUBIO MONOCOAT STIRRING STICK

Rubio WoodCream must be stirred well before use, especially when adding Rubio WoodCream Softener. Use our handy wooden Rubio Monocoat Stirring Stick to do so! To stir the 100 ml can, we recommend using a smaller stirrer.



RUBIO WOODCREAM BRUSH

Rubio WoodCream brushes smoothly thanks to our specially developed Rubio WoodCream Brush. The brush is made of polyester fibre, doesn't leave brush marks and product doesn't dry on the brush easily. You can use the brush on both smooth and rough surfaces.

Rubio WoodCream Brush is available in different widths: 1", 2" and 3".

RUBIO WOODCREAM SOFTENER FOR COLOUR EFFECTS AND MAINTENANCE SOLUTIONS

Rubio WoodCream Softener is the perfect Rubio WoodCream partner. By mixing the two together you can create **different colour effects**. This way you can decrease the colour intensity of the existing Rubio WoodCream colours to achieve a more transparent effect. Rubio WoodCream Softener also offers the solution for fans of an **instant aged look**: mix one of the colours from the Grey Collection with Rubio WoodCream Softener.

Rubio WoodCream Softener is also the ideal product for maintenance **solutions** on wooden surfaces treated with Rubio WoodCream.



Unique characteristics

- > 0% VOC
- > Reduces the solid content without changing the viscosity
- > Elongation of the drying time
- Easier to work with in hot conditions
- Reduces the risk of overlaps
- > Easier spreadability on rough and absorbing substrates
- > Reduces layer build-up when renovating and refreshing Rubio WoodCream and when Rubio WoodCream is applied in 2 layers



Bilute, stir and apply!

Aged effect



BLUE GREY #5



BLUE GREY #5 + Rubio WoodCream Softener



CHARMING GREY #8



CHARMING GREY #8 + Rubio WoodCream Softener



The Rubio lab has developed three beautiful colour collections that will colour and protect your wood and make it water-repellent: The Traditional Collection, The Grey Collection, and The Scandinavian Collection.

The Traditional Collection – on pine







Tips & Tricks

- > Create an **instant aged look** by adding Rubio WoodCream Softener to one of the colours from this Grey colour
- A transparent version (#0) is also available in order to create a **non-coloured effect**. While this version has no UV-filter, Transparent #0 allows the wood to age naturally, but it still protects the wood and makes it water-repellent. Apply it undiluted.

The Scandinavian Collection – on pine







COLOUR AND PROTECT YOUR **EXTERIOR WOOD PROJECTS WITH RUBIO MONOCOAT**

For finishing exterior walls, garden sheds and gates, wood is being used more and more, often combined with other materials. The wood can be protected in many ways, depending on the desired result.

In addition to Rubio WoodCream, Rubio Monocoat has had Rubio Monocoat Hybrid **Wood Protector** in its exterior range with great success for years.

Do you have an exterior wood project you want to colour and protect with Rubio Monocoat? Then have a look at the characteristics overview and choose the right product for your project.

RUBIO MONOCOAT HYBRID WOOD PROTECTOR

- › Oil
- Molecular bonding
- > Transparent colour look
- > Wood warming effect
- On vertical and horizontal wood
- Monocoat: colours and protects in one single layer
- Apply and wipe off traces of excess product with a piece of cloth
- New projects

RUBIO WOODCREAM

- > Wax-based cream
- Nourishing cream technology
- Covering colour look
- No wood warming effect
- On vertical wood
- Colours and protects in one or more layers
- > Easy to apply with brush
- > Renovations and new projects

TECHNICAL DATA SHEETS

Rubio WoodCre		10 -	15
Rubio WoodCre	eam Softener	16 -	

VS





Rubio WoodCream

Protecting the natural beauty of wood

Rubio WoodCream is a breathable hydrophobic wax-based cream that colours and protects wood and makes it water-repellent. The hydrophobic Rubio WoodCream technology in combination with its unique cream structure offers both on product as on application level important benefits. This moisture-regulating cream provides a water-repellent and self-cleaning wood protection. The long contact technology ensures a perfect absorption of the cream into the wood's pores, without covering them, thus ensuring the wood's natural moisture balance and structure.

Rubio WoodCream gives wood surfaces a semi-transparent, aged, or covering look and is available in 3 colour collections: The Grey Collection, the Traditional Collection, and the Scandinavian Collection. A transparent version (#0) is also available in order to create a non-coloured effect. While this version has no UV-filter it allows the wood to age naturally, but it still protects the wood and makes it water-repellent. This transparent version will also protect already aged wood.



Depending on the chosen colour, wood type and orientation of the vertical wood, the colour will last between 5 to 10 years. After about 5 years, the pearl effect (water-beading) will gradually diminish.

If you want to decrease the colour intensity of the existing Rubio WoodCream colours, you can dilute them with **Rubio WoodCream Softener**.



ATTENTION

Adding Rubio WoodCream Softener reduces the UV resistance of the product. This can cause premature discolouration. This discolouration effect depends on the amount of Rubio WoodCream Softener added.

PRODUCT INFORMATION

> Unique characteristics

- · Wax-based cream
- Hydrophobic cream
- Low environmental impact
- VOC free
- · Non film-forming, does not flake off
- Water-repellent with pearl effect
 - The pearl effect makes the surface self-cleaning
- The water-repellent and self-cleaning effect reduce the risk of micro-organism growth (algae, molds, fungi) and frost damage • Breathable and moisture-regulating
 - The wood pores remain open; this allows the wood to breath and guarantees an optimal moisture-regulation
- Cream structure
- Penetrates deep into the subsoil
- · Low usage: 50 to 80 g/m² per layer, depending on the absorption of the substrate
- Easy to apply on all vertical wooden surfaces
- Easier to apply on other paint systems and surfaces than other paints and wood treatment products (no dripping, no masking tape, easy to apply overhead)
- · Can be applied in 1 or 2 layers depending on the look you want

REMARK

The wood pores remain open; this allows the wood to breath and guarantees an optimal moisture-regulation. Rubio WoodCream is water-repellent and self-cleaning, reducing the risk of micro-organism growth (algae, molds, fungi).



TECHNICAL DATA SHEET | EXTERIOR

> Technical characteristics

- · Chemical basis: wax-based
- Physical state: cream
- Density: 950-1050 g/L (transparent colours)
- pH: 8.0 9.0
- · Gloss level: semi matt
- Drying time: depending on the climatic conditions: ± 12 hours
- Touch dry after 30 minutes
- A second layer can be applied after 3 hours
- The pearl effect already starts after 3 hours
- · VOC-free

TECHNICAL INFORMATION

Rubio WoodCream is a breathable hydrophobic wax-based cream that colours and protects the wood and makes it water-repellent. The wax-based cream leaves no film behind, so that the porosity remains open and therefore the vapour permeability is retained. Wood fibres have a capillary effect that allows water to be easily absorbed. By applying a wax-hydrophobic agent to the pore walls, this capillary effect is converted into a water-repellent effect, but without reducing the opening of the pores necessary for vapour diffusion. Air and water vapour are let through just as before.

The cream structure of the wax-based cream creates a long contact time of the product with the wood. This gives the capillary effect of the wood enough time to absorb the active water-repellent ingredients. This creates a very deep penetration into the wood, which benefits the durability of the water-repellent effect. This allows the wood to be coloured and made water-repellent in one layer. If you want to achieve a visually more covering colour effect, this can easily be done by applying a second layer without changing the properties of the cream. However covering the system is applied, this technology will ensure the natural look and feel of the wood.

> Storage

The product can be stored up to 24 months. Store in dry conditions and in the original unopened packaging. Keep away from frost.

› Packaging

· Can 100 ml, 1 L, 2,5 L, 5 L and 20 L

> Consumption

Depending on the type of substrate: 12-20 m²/L

These usages are merely indicative. Results depend on wood type and method of preparation. It is always recommended to make a sample in order to calculate the exact usage.



> Colours

Colours shown are on pine.

The colours shown are for reference only and are not binding.













GREEN GREY #6





TRANSPARENT #0

ne Traditional Collection



SOFT TAUPE















OSLO OCHRE

FJORD BLUE



AURORA BLUE







OSLO OCHRE SWEDISH RED







TECHNICAL DATA SHEET | EXTERIOR

APPLICATION INFORMATION

On site application

Range of use:

- · Wood outdoors vertical wood application
- · Wood moisture level: max. 18%
- Wood elements without ground contact according to EN 335-1, appl. class 2 and 3
- · Building elements without dimensional stability: e.g. fences, framework, carports, wood sidings
- · Building elements with limited dimensional stability: e.g. shutters, profiled boards, garden sheds

> Preparation

- Application temperature: 10°C 30°C
- Ensure that the vertical wood is dry and clean
- In case of extremely soiled and oily wood or mildew stains, the wood must be cleaned with a mixture of 10% Rubio Monocoat Exterior Wood Cleaner and water. The wood must be thoroughly rinsed with water after the use of Rubio Monocoat Exterior Wood Cleaner before application.

Consult the accompanying technical data sheet before use.

> Instructions for use

Manual application

A. On new wood

- STEP 1. Prepare the surface in order to achieve the desired result (planed, sanded wire brushed...).
- STEP 2. Remove sanding dust from the surface and wipe dry.
- STEP 3. Stir Rubio WoodCream well before applying it (undiluted).
- **STEP 4.** Apply carefully and evenly, to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in the direction of the wood fibre. It's best to work wet in wet. Spread out the product in one go with the application brush.
- **STEP 5.** In case a more covering result is required you can apply a second layer after at least 3 hours. Since the first layer is already water-repellent, the second layer will not adhere to the first layer as easily. We recommend spreading the product with the block brush on the first layer in one smooth movement and go over it several times.

a. Creating an aged/transparent effect on new wood

- **STEP 1.** Prepare the surface in order to achieve the desired result (planed, sanded wire brushed...).
- **STEP 2.** Remove sanding dust from the surface and wipe dry.
- **STEP 3.** Stir Rubio WoodCream well and **dilute it with Rubio WoodCream Softener** in order to create a more transparent effect (proportion: max 1:1).
- **STEP 4.** Apply carefully and evenly to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in the direction of the wood fibre. It's best to work wet in wet. Spread out the product in one go with the application brush.

REMARK

- In order to create an **aged effect** on new wood a colour from the **Grey Collection** must be diluted with Rubio WoodCream Softener.
- In order to create a more **transparent effect** (when desired) a Rubio WoodCream colour must be **diluted** with **Rubio WoodCream Softener**. Add Rubio WoodCream Softener until the desired effect is achieved. The maximum proportion is 1: 1.
- In order to create a **non-coloured effect** you can use the colour **Transparent #0** (undiluted) from the **Grey Collection**. While this version has no UV-filter it allows the wood to age naturally, but it still protects the wood and makes it water-repellent.

B. In case of renovation/refreshing Rubio WoodCream

- **STEP 1.** Clean the surface by using water at low pressure and a soft brush; there is no need for sanding.
- **STEP 2.** Stir Rubio WoodCream well and dilute it with Rubio WoodCream Softener in a ratio from 9 parts Rubio WoodCream and 1 part Rubio WoodCream Softener. You can adjust this ratio to max. 1 part Rubio WoodCream and 1 part Rubio WoodCream Softener to achieve the desired result.
- **STEP 3.** Apply it carefully and evenly, to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in the direction of the wood fibre. It's best to work wet in wet. Spread out the product in one go with the application brush.

Rubio **WoodCream I** 13



C. In case of renovation on older non-Rubio products

- STEP 1. In case of extremely soiled and oily wood or mildew stains, the wood must be cleaned with a mixture of 10% Rubio Monocoat Exterior Wood Cleaner and water. The wood must be thoroughly rinsed with water after the use of Rubio Monocoat Exterior Wood Cleaner before application. Consult the accompanying technical data sheet before use.
- **STEP 2.** Remove all loose coatings or wood fibres (sanding, steel, or brass brush).
- **STEP 3.** Remove sanding dust from the surface and wipe dry.
- STEP 4. Stir Rubio WoodCream well before applying it (undiluted), carefully and evenly, to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in a horizontal direction. It's best to work wet in wet. Spread out the product in one go with the application brush.
- STEP 5. Apply a second layer in order to prevent gloss differences between raw wood and patches where the old coating was still

Industrial application

If you want to apply this product in an industrial manner, we advise you to get in contact with our technical care team.

> Maintenance information

In general we recommend a yearly visual check-up just after winter season.

Please check for the presence of the following three points:

- a. Dirt & green deposits; clean with low pressure water and soft brush
- b. Fading out of colours
- c. Diminishing pearl effect

If necessary (concerning point b./c.), apply a maintenance coat according to the instructions. The frequency of maintenance depends on the weather conditions:

- In normal weather conditions: every 5 years
- In extreme weather conditions: every 3 years
- In ideal circumstances, this can take significantly longer: up to 10 years

Normal climates: when the colour fades, apply a maintenance coat of Rubio WoodCream with Rubio WoodCream Softener in a ratio from 9 parts Rubio WoodCream and 1 part Rubio WoodCream Softener to max. 1 part Rubio WoodCream and 1 part Rubio WoodCream Softener to achieve the desired result. Consult the technical data sheet for more information.

Frequency according to exposure, geographical situation, solar orientation of the treated wood, wood type, and desired shade. Waterfront, seaside, pilling, wetland, and marshland ... sometimes requiring a more frequent maintenance.

> Maintenance instructions

- STEP 1. The wood must be cleaned with a mixture of 10% Rubio Monocoat Exterior Wood Cleaner and water. After the use of Rubio Monocoat Exterior Wood Cleaner, clean the surface by using water at low pressure and a soft brush; there is no need for sanding. Consult the accompanying technical data sheet before use.
- STEP 2. Stir Rubio WoodCream well and dilute it with Rubio WoodCream Softener in a ratio from 9 parts Rubio WoodCream and 1 part Rubio WoodCream Softener to max. 1 part Rubio WoodCream and 1 part Rubio WoodCream Softener in order to achieve the desired result.
- **STEP 3.** Apply it carefully and evenly, to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in the direction of the wood fibre. It's best to work wet in wet. Spread out the product in one go with the application brush.


> Tips & Tricks

- Avoid direct sunlight on the surface.
- · In case of high temperatures (> 30°C) or when there is no shadow, we recommend diluting Rubio WoodCream with Rubio WoodCream Softener in order to make the product easier to apply and to allow it to dry less quickly.
- · On rough and very absorbent wood surfaces, we recommend diluting Rubio WoodCream with Rubio WoodCream Softener so you can easily apply Rubio WoodCream on the surface. For a more covering effect you can apply a second layer.



TECHNICAL DATA SHEET | EXTERIOR

> Tools & accessories





Clean the tools with water after application.

> Related products





Cleaner

Rubio WoodCream Softener

Check the packaging and the safety data sheet for more details.

of TDS: 9/02/2021. Check the safety information before using the product.

For our complete assortment of products for the protection and colouring of interior and exterior wood, please visit www.rubiomonocoat.com

YOUR DISTRIBUTOR:



LIABILITY: It is the user's responsibility to establish, through his own tests, whether the product is suitable for the chosen application. In no case can Muylle Facon BV be held liable for any consequential damage. The information above may be subject to changes, which will be published in the updated versions of the technical data sheet. We cannot be held liable for poor results due to causes that are not related to the quality of the product. This technical information has been drawn up based on the currently available information and knowledge. The most recent technical data sheets can be requested or are available on the website. **Date**

Muylle Facon BV Ambachtenstraat 58 8870 Izegem (BELGIUM)

> Phone +32 (0) 51 30 80 54 Fax +32 (0) 51 30 99 78 info@muyllefacon.be

MUYLLE 1 FACON

www.rubiomonocoat.com

14 Rubio WoodCream I 15



Rubio WoodCream Softener

Accompanies Rubio WoodCream for colour effects and maintenance solutions

Rubio WoodCream Softener is a ready-to-use product that allows you to decrease the colour intensity of the Rubio WoodCream colours and create a more transparent or aged effect. Rubio WoodCream Softener is the ideal maintenance product for maintaining surfaces treated with Rubio WoodCream.



ATTENTION

Rubio WoodCream Softener must always be used in combination with Rubio WoodCream. Do not use Rubio WoodCream Softener on a standalone basis.

Adding Rubio WoodCream Softener reduces the UV resistance of the product. This can cause premature discolouration. This discolouration effect depends on the amount of Rubio WoodCream Softener added.

PRODUCT INFORMATION

Specific characteristics

- 0% VOC
- Reduces the tinting strength without changing the viscosity
- Elongation of the drying time
 - Easier to work with in hot conditions (reduce risk of overlaps)
- Easier spreadability on rough and absorbing substrates
- Reduces the layer build up when Rubio WoodCream is used in 2 layers
- · Rubio WoodCream becomes an ideal maintenance product when adding Rubio WoodCream Softener

> Technical characteristics

- Colour: opaque
- Odour: light ammoniac
- Physical state: liquid
- · Density: 927 g/L
- pH: 9,35
- · Solubility: soluble in water

> Storage

The product can be stored up to 24 months. Store in dry conditions and in the original packaging. Keep away from frost.

› Packaging

- · Plastic bottle: 100 ml, 1L
- · Jerrycan: 5L



TECHNICAL DATA SHEET | EXTERIOR

OUIET GREEN

NAVY BLUE

> Colours

Colours shown are on pine.

The colours shown are for reference only and are not binding.

DIRTY GREY #1 TIMELESS GREY #2 MISTY GREY #3 DIRTY GREY #1 TIMELESS GREY #2 MISTY GREY #3 GRAVEL GREY #4 BLUE GREY #5 GREEN GREY #6 GRAVEL GREY #4 BLUE GREY #5 GREEN GREY #6 BOLD BLACK #7 CHARMING GREY #8 TRANSPARENT #0 BOLD BLACK #7 CHARMING GREY #8





APPLICATION INFORMATION

On site application

> Preparation

Ambient temperature: 10°C – 30°C
Substrate temperature: 10°C – 30°C
Application temperature: 10°C – 30°C

> Instructions for use

Manual application

A. Creating an aged/transparent effect on new wood

STEP 1. Prepare the surface in order to achieve the desired result (planed, sanded wire brushed...).

STEP 2. Remove sanding dust from the surface and wipe dry.

STEP 3. Stir Rubio WoodCream well and and **dilute it with Rubio WoodCream Softener** in order to create a more transparent effect (proportion: max. 1:1).

STEP 3A. In order to create an aged effect:

STEP 3B. This effect can only be achieved with a colour from the Rubio WoodCream Grey Collection. Stir Rubio WoodCream well and dilute it with Rubio WoodCream Softener (proportion: max. 1:1).

STEP 4. Apply carefully and evenly to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in the direction of the wood fibre. It's best to work wet in wet. Spread out the product in one go with the application brush.

B. In case of renovation/refreshing Rubio WoodCream

STEP 1. Clean the surface by using water at low pressure and a soft brush; there is no need for sanding.

STEP 2. Stir Rubio WoodCream well and dilute it with Rubio WoodCream Softener in a ratio from 9 parts Rubio WoodCream and 1 part Rubio WoodCream Softener. You can adjust this ratio to max. 1 part Rubio WoodCream and 1 part Rubio WoodCream Softener to achieve the desired result.

STEP 3. Apply carefully and evenly to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in the direction of the wood fibre. It's best to work wet in wet. Spread out the product in one go with the application brush.

C. Maintenance instructions

In general we recommend a yearly visual check-up just after winter season.

Please check for the presence of the following three points:

- a. Dirt & green deposits; clean with low pressure water and soft brush
- b. Fading out of colours
- c. Diminishing pearl effect

If necessary (concerning point b./c.), apply a maintenance coat according to the instructions. The frequency of maintenance depends on the weather conditions:

- In normal weather conditions: every 5 years
- In extreme weather conditions: every 3 years
- In ideal circumstances, this can take significantly longer: up to 10 years

Normal climates: when the colour fades, apply a maintenance coat of Rubio WoodCream with Rubio WoodCream Softener in a ratio from 9 parts Rubio WoodCream and 1 part Rubio WoodCream Softener to max. 1 part Rubio WoodCream and 1 part Rubio WoodCream Softener to achieve the desired result. Consult the technical data sheet for more information.

Frequency according to exposure, geographical situation, solar orientation of the treated wood, wood type, and desired shade. Waterfront, seaside, pilling, wetland, and marshland ... sometimes requiring a more frequent maintenance.

- **STEP 1.** The wood must be cleaned with a mixture of 10% Rubio Monocoat Exterior Wood Cleaner and water. After the use of Rubio Monocoat Exterior Wood Cleaner, clean the surface by using water at low pressure and a soft brush; there is no need for sanding. Consult the accompanying technical data sheet before use.
- STEP 2. Stir Rubio WoodCream well and dilute it with Rubio WoodCream Softener in a ratio from 9 parts Rubio WoodCream and 1 part Rubio WoodCream Softener to max. 1 part Rubio WoodCream and 1 part Rubio WoodCream Softener in order to achieve the desired result.
- **STEP 3.** Apply it carefully and evenly, to the vertical surface with a block brush suitable for water-beaded products, in the direction of the wood. Work in zones of 3 to 4 boards in the direction of the wood fibre. It's best to work wet in wet. Spread out the product in one go with the application brush.




TECHNICAL DATA SHEET | EXTERIOR

> Tips & Tricks

- · Avoid direct sunlight on the surface.
- In case of high temperatures (> 30°C) or when there is no shadow, we recommend diluting Rubio WoodCream with Rubio WoodCream Softener in order to make the product easier to apply and to allow it to dry less quickly.
- On rough and very absorbent wood surfaces, we recommend diluting Rubio WoodCream with Rubio WoodCream Softener so you can easily apply Rubio WoodCream on the surface. For a more covering effect you can apply a second layer.

> Tools & accessories



Clean the tools with water after application.

> Related products



Check the packaging and the safety data sheet for more details.

of TDS: 9/02/2021. Check the safety information before using the product.

For our complete assortment of products for the protection and colouring of interior and exterior wood, please visit **www.rubiomonocoat.com**

to causes that are not related to the quality of the product. This technical information has been drawn up based on the currently available information and knowledge. The most recent technical data sheets can be requested or are available on the website. **Date**

YOUR DISTRIBUTOR:




Muylle Facon BV Ambachtenstraat 58 8870 Izegem (BELGIUM)

Phone +32 (0) 51 30 80 54 Fax +32 (0) 51 30 99 78 info@muyllefacon.be

MUYLLE 1 FACON

www.rubiomonocoat.com

Rubio **WoodCream I** 19

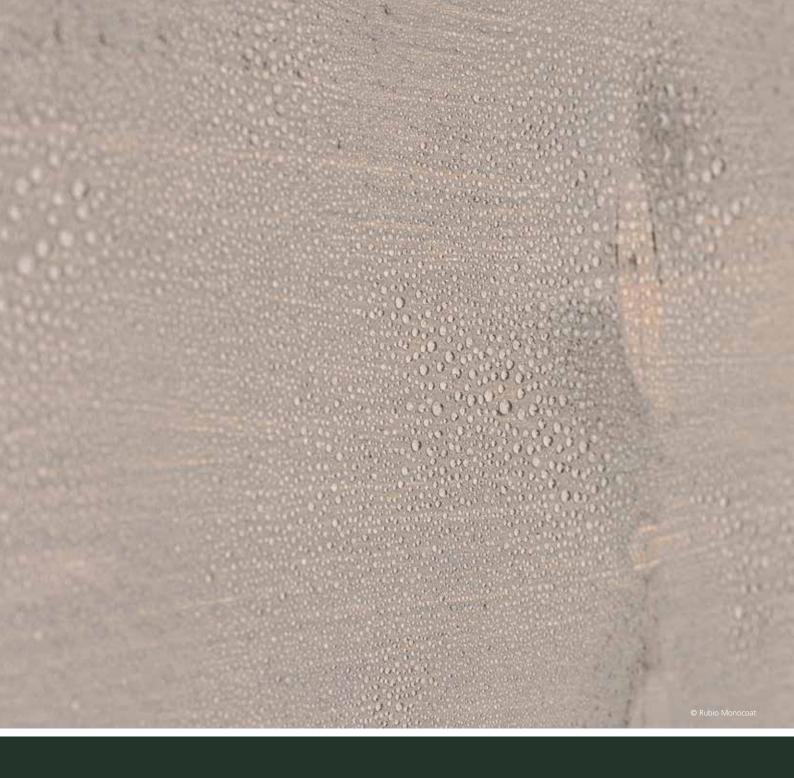

WELCOME TO THE RUBIO MONOCOAT FAMILY

More than 82 countries - 50.000.000 m² treated wood per year

