



Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule #:	Model No.:

For use with the following Daikin RA & RA-Multi Indoor Models: FDXS Slim Duct & CTXS / FTXS Wall Mount  
 For use with the following Daikin RA & RA-Multi Outdoor Models: RX Std. Efficiency, RXS High Efficiency, 2MXS & 4MXS

FEATURES / BENEFITS
<ul style="list-style-type: none"> <li>Includes 8m (26ft) of cable</li> <li>Built in one time or daily timer functionality with up to 2 timer actions per day</li> <li>LCD lets you display set point temperature in either °F or °C units in 1 degree increments</li> <li>Monitors room temperature and preset temperature by microcomputer and can select cool or heat operation modes automatically based on the set-point requirement</li> <li>Selectable auto / cool / heat / dry operation modes with adjustable temperature and airflow rates</li> <li>Approximately two hour battery backup</li> <li>Required remote control adapter PCB included</li> <li>Controller can be used in conjunction with the factory supplied standard wireless remote controller</li> </ul>

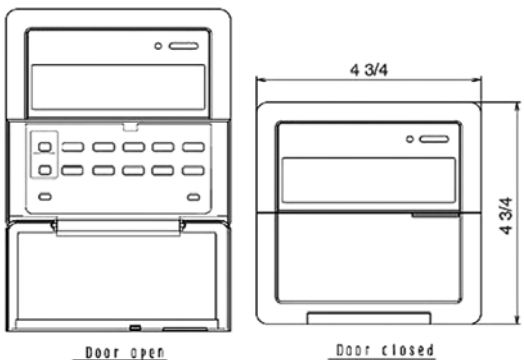

Remote Controller Functions	
<b>OPERATION</b>	Start / Stop
	Operation Mode
	Temperature Setting
	64°F – 90°F Set Point Range
	Fan Speed
<b>MONITORING</b>	Airflow Direction
	Status
	Operation Mode
	Temperature Setting
	Fan Speed
<b>SCHEDULING</b>	Airflow Direction
	One Time Timer
	Daily Timer

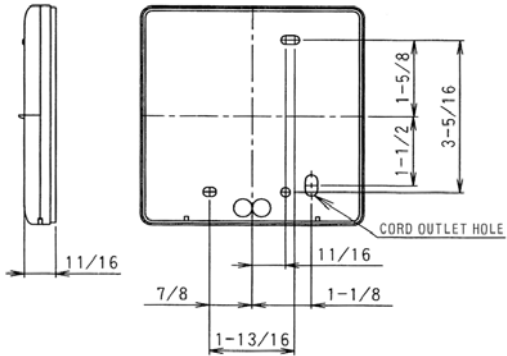

CABLE SPECIFICATIONS	
<b>TYPE</b>	4-wire sheathed vinyl cable
<b>TOTAL LENGTH</b>	BRCW901A08 – Approx. 8m (26ft)