

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule #:	Model No.:


For use with the following Daikin VRV Models: FXFQ; FXHQ; FXLQ; FXMQ; FXNQ; FXSQ; FXDQ; FXAQ; FXOQ

Remote controller wiring for transmission for a simplified remote controller (BRC2A71) is the same as that of a standard remote controller (BRC1D71). Because the functions of the simplified remote controller are limited, it is recommended using in combination with a central remote controller.

FEATURES / BENEFITS
<ul style="list-style-type: none"> <li>1 group/maximum of 16 units controllable.</li> <li>Simple, compact and easy-to-operate unit.</li> <li>Suitable for use in hotel bedrooms.</li> </ul>

<b>OPERATION</b>	Start/Stop
	Operation Mode
	Temperature Setting
	60°F – 90°F Set Point Range
	Fan Speed
<b>MONITORING</b>	Status
	Malfunction Flashing
	Malfunction Content
	Operation Mode
	Temperature Setting
	Permit/Prohibit Selection
	Fan Speed
<b>CONTROL MANAGEMENT</b>	Field Setting Mode
	Group Setting
	Auto Re-Start

SPECIFICATIONS OF CORD	
<b>TYPE</b>	2-core sheathed vinyl cord or cable
<b>SIZE</b>	AWG18-2

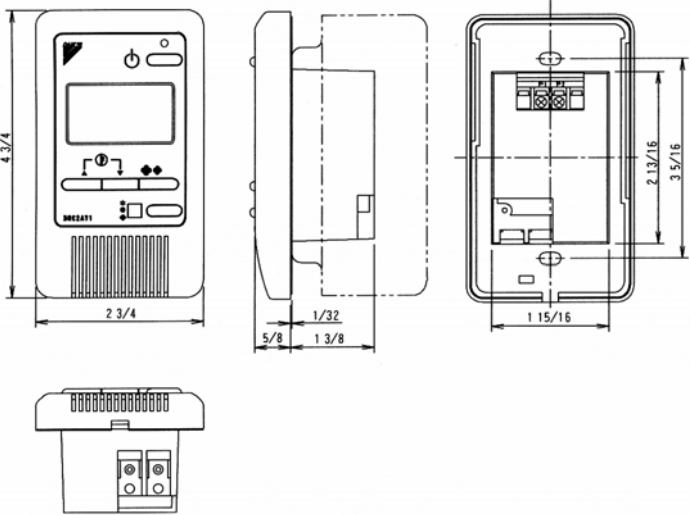

If used with FXFQ, FXAQ, FXNQ & FXLQ no louver function exists.