Job Name:	
Tag#	



### FFQ09Q2VJU / RX09RMVJU9

.75-Ton Ceiling Mounted Heat Pump System



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.* 

Indoor Specifications					
	Cooling		Heating		
	н		М	н	М
Airflow Rate (cfm)	378		339	399	357
	L		L		
		26	58	28	32
Sound (dBA) H / M / L	38 / 35 / 29		38 / 3	5 / 29	
Dimensions (H × W × D) (in)			10-1/4 ×	22-5/8 × 22	2-5/8
Weight (Lbs)				36	

Outdoor Specifications					
Compressor	Compressor		Hermetically Sealed Swing Type		
Refrigerant	Refrigerant		R-410A		
Factory Charge (Lbs) Refrigerant Oil		2.09			
		PVE (FVC50K)			
Airflow Rate (cfm)		Cooling Heatin		ting	
Ainow Rate (cim)	н		985	н	1,105
Sound Pressure Level (de	Sound Pressure Level (dBA)			46 / 50	
Dimensions (H × W × D) (in)		21-5/8 × 26-9/16 × 11-3/16		-3/16	
Weight (Lbs)				60	

Efficiency			
Cooling		Hea	ting
SEER	20.90	HSPF	11.70
EER	13.0	СОР	4.58

### Performance

Cooling (Btu/hr)			
Rated (Min/Max)	9,100 (4,600 / 11,100)		
Sensible @ AHRI	7,990		
Standard Operating Range	50°F – 115°F		
Extended Operating Range*	-4°F – 115°F		
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB		
	Outdoor: 95°F DB/75°F WB		

\*With field settings and wind baffle


Heating (Btu/hr)			
1:@ 47° Rated (Min/Max)	10,000 (4,600 / 14,000)		
2: @ 17° Rated	6,000		
3: @ 5°	4,480		
Operating Range	5°F – 65°F		
1: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB		
	Outdoor: 47°F DB/43°F WB		
2: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB		
	Outdoor: 17°F DB/15°F WB		
3:Heating Conditions:	Indoor: 70°F DB/60°F WB		
	Outdoor: 5°F DB/5°F WB		

Electrical					
	208/60/1	230/60/1			
System MCA	9.0	9.0			
System MFA	15	15			
Compressor RLA	7.5	7.5			
Outdoor fan motor FLA	.13	.13			
Outdoor fan motor W	39	39			
Indoor fan motor FLA	.28	.28			
Indoor fan motor W	50	50			
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)					
RLA: Rated load amps (A) W: Fan motor rated output (W)					

Piping	
Liquid (in)	1/4
Gas (in)	3/8
Drain (in)	1-1/32
Max. Interunit Piping Length (ft)	65.625
Max. Interunit Height Difference (ft)	49.25
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.21


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

## FFQ09Q2VJU Dimensional Data

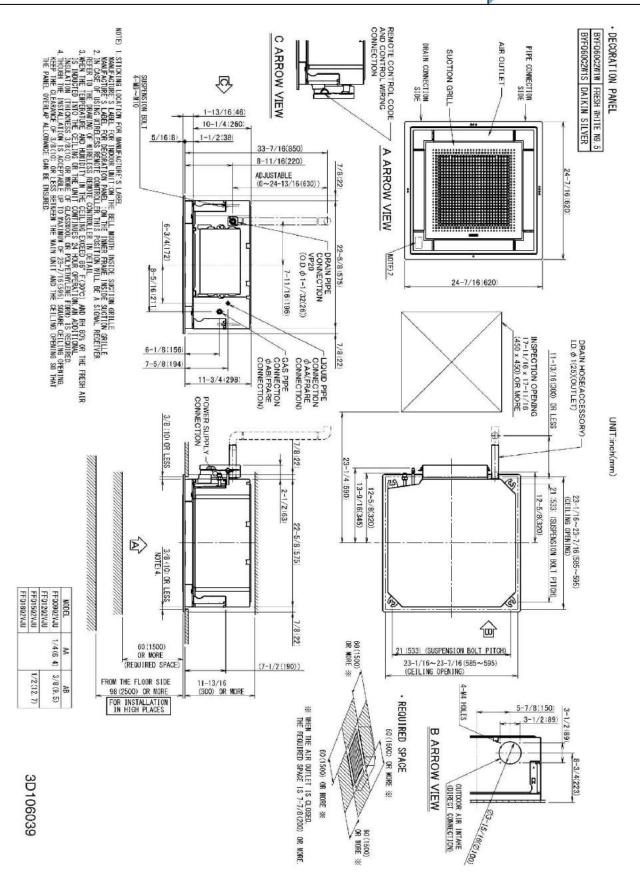

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056



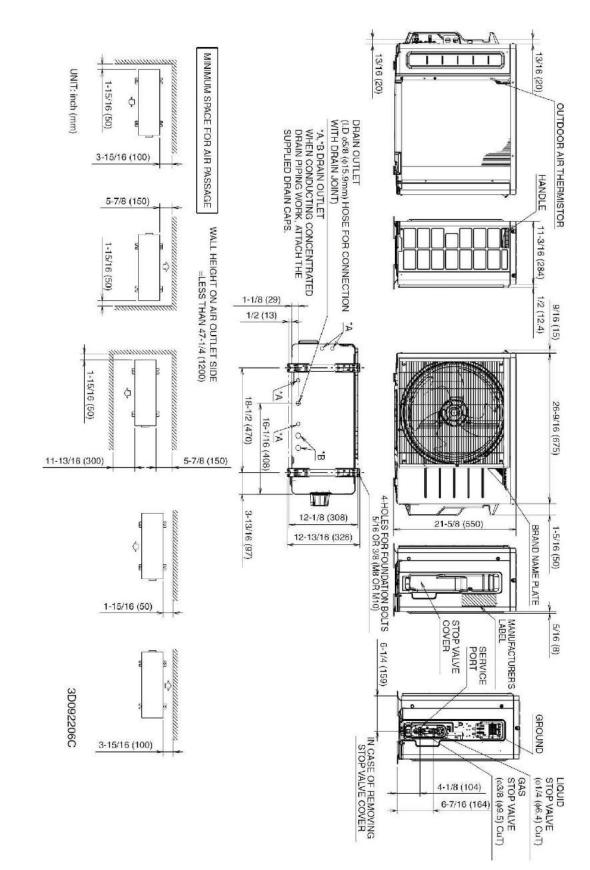

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Page 3 of 4

### **RX09RMVJU9** Dimensional Data



# **Optional Accessories**

	Indoor Unit – One Controller & Decoration Panel are Required				
Included	Part Number	Description			
	BRC1E73	Wired Navigation Remote Controller			
	BRC082A42W	Wireless Remote Controller (White)			
	BRC082A42S Wireless Remote Controller (Silver)				
BYFQ60C2W1S Low Profile Decoration Panel (Silver) - $1-\frac{13}{16} \times 24-\frac{7}{16} \times 24-\frac{7}{16}$					
	BYFQ60C2W1W Low Profile Decoration Panel (White) - $1-\frac{13}{16} \times 24-\frac{7}{16} \times 24-\frac{7}{16}$				
BRYQ60A2S Sensor kit (Silver) Intelligent Eye, Comfort Airflow, and Floor Sensor					
BRYQ60A2W Sensor kit (White) Intelligent Eye, Comfort Airflow, and Floor Sensor					
	BDBHQ44C60	Sealing member of air discharge outlet			
	KAF441C60 Replacement Long Life Filter				
	DACA-CP2-1 Maxi Orange Condensate Pump				
	DACA-CP3-1 Mini Condensate Pump 5 gph				
	AZAI6WSCDKA DKN Cloud Wi-Fi Adaptor				

	Outdoor Unit				
Included	Part Number	Description			
	DACA-WB-1 Powder-Coated Wall-Mounted Bracket				
	KPW937F4Low Ambient Wind Baffle /Air Adjustment Grille (09 & 12)				
	KEH067A41E Drain Pan Heater				
KKG067A41Back protection wire net (09 & 12)					
	KPS067A41	Snow hood (intake side plate) (09 & 12)			
	KPS067A42Snow hood (intake rear place) (09 & 12)				
	KPS067A44 Snow hood (outlet) (09 & 12)				
	KKP937A4 Drain Plug for OD Unit				

## Standard Equipment

Part Number	Description
6017766	Drain Pump
2139531	Float Switch

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without





Job Name:	
Tag#	



### FFQ12Q2VJU / RX12RMVJU9

1-Ton Ceiling Mounted Heat Pump System



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.* 

Indoor Specifications						
	Cooling			Heating		
	H M		н	М		
Airflow Rate (cfm)	406		353	427	371	
	Ĺ		L			
	268		282			
Sound (dBA) H / M / L	39 / 36 / 30		39 / 36 / 30			
Dimensions (H × W × D) (in)		10-1/4 × 22-5/8 × 22-5/8		2-5/8		
Weight (Lbs)		36				

Outdoor Specifications						
Compressor		Hermetically Sealed Swing Type				
Refrigerant		R-410A				
Factory Charge (Lbs)		2.09				
Refrigerant Oil			PVE (FVC50K)			
Airflow Rate (cfm)	Cooling		Heating			
Annow Nate (cnn)	н	I	1,105	н	1,105	
Sound Pressure Level (dBA)				49 / 51		
Dimensions ( $H \times W \times D$ ) (in)		21-5/8 × 26-9/16 × 11-3/16				
Weight (Lbs)		60				
· · · · ·			21-5/8 × 2		-3/16	

Efficiency					
Cooling Heating					
<b>SEER</b> 20.20		HSPF	11.20		
EER	12.5	СОР	4.02		

#### Performance

Cooling (Btu/hr)				
Rated (Min/Max)	10,800 (4,600 / 13,300)			
Sensible @ AHRI	8,430			
Standard Operating Range	50°F – 115°F			
Extended Operating Range*	-4°F — 115°F			
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB			

Outdoor: 95°F DB/75°F WB

\*With field setting and wind baffle

* with field setting and wind barrie				
Heating (Btu/hr)				
1:@ 47° Rated (Min/Max) 13,500 (4,600 / 16,800)				
2: @ 17° Rated	8,300			
<b>3: @ 5°</b> 6,040				
<b>Operating Range</b> 5°F – 65°F				
1: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB			
	Outdoor: 47°F DB/43°F WB			
2: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB			
	Outdoor: 17°F DB/15°F WB			
3: Heating Conditions:	Indoor: 70°F DB/60°F WB			
	Outdoor: 5°F DB/5°F WB			

#### Electrical


	208/60/1	230/60/1		
System MCA	9.1	9.1		
System MFA	15	15		
Compressor RLA	7.5	7.5		
Outdoor fan motor FLA	.13	.13		
Outdoor fan motor W	39	39		
Indoor fan motor FLA	.28	.28		
Indoor fan motor W	50	50		
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)				
<b>RLA</b> : Rated load amps (A)	W: Fan motor rate	d output (W)		

RLA: Rated load amps (A) W: Fan motor rated output (W)

Piping				
Liquid (in)	1/4			
Gas (in)	3/8			
Drain (in)	1-1/32			
Max. Interunit Piping Length (ft)	65.625			
Max. Interunit Height Difference (ft)	49.25			
Chargeless (ft)	32.8			
Additional Charge of Refrigerant (oz/ft)	.21			

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

## FFQ12Q2VJU Dimensional Data

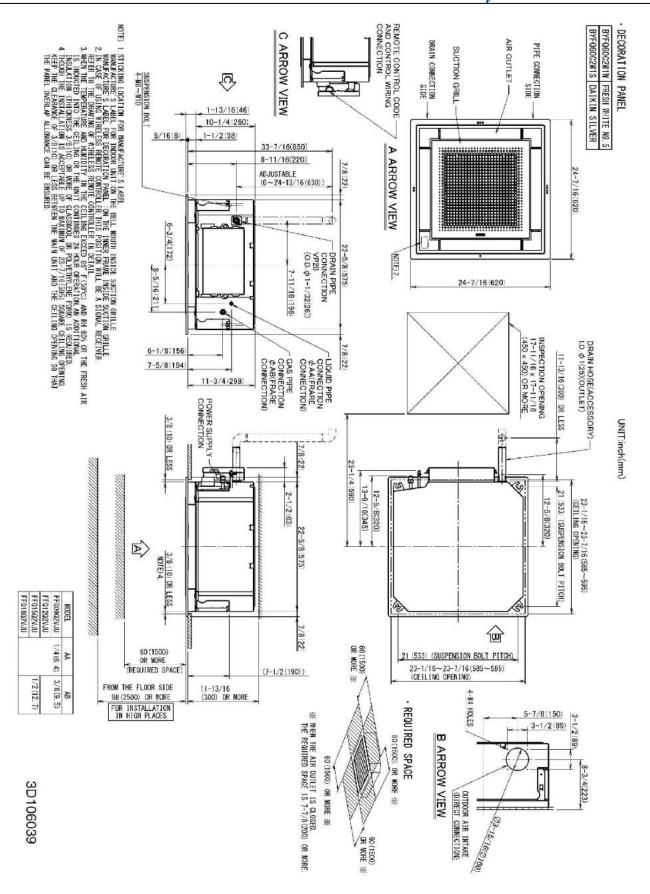


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

DAIKI



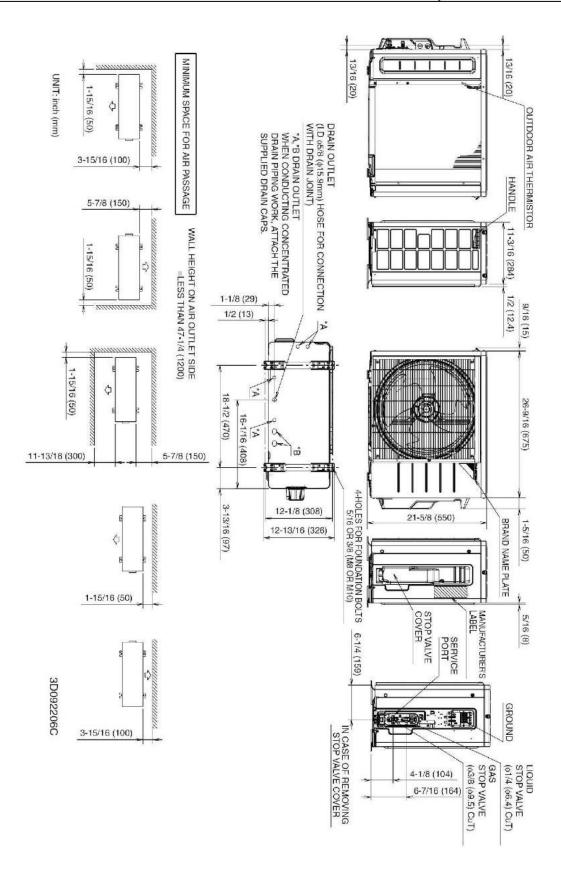

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056



	Indoor Unit – One Controller & Decoration Panel are Required				
Included	Part Number	Description			
	BRC1E73 Wired Navigation Remote Controller				
	BRC082A42W Wireless Remote Controller (White)				
	BRC082A42S Wireless Remote Controller (Silver)				
BYFQ60C2W1S Low Profile Decoration Panel (Silver) - $1^{-13}/_{16} \times 24^{-7}/_{16} \times 24^{-7}/_{16}$					
BYFQ60C2W1W Low Profile Decoration Panel (White) - $1-\frac{13}{16} \times 24-\frac{7}{16} \times 24-\frac{7}{16}$					
	BRYQ60A2S Sensor kit (Silver) Intelligent Eye, Comfort Airflow, and Floor Sensor				
	BRYQ60A2W	Sensor kit (White) Intelligent Eye, Comfort Airflow, and Floor Sensor			
	BDBHQ44C60	Sealing member of air discharge outlet			
	KAF441C60	Replacement Long Life Filter			
	DACA-CP2-1 Maxi Orange Condensate Pump				
	DACA-CP3-1	Mini Condensate Pump 5 gph			
	AZAI6WSCDKA DKN Cloud Wi-Fi Adaptor				

	Outdoor Unit				
Included	Part Number	Description			
	DACA-WB-1 Powder-Coated Wall-Mounted Bracket				
	KPW937F4Low Ambient Wind Baffle /Air Adjustment Grille (09 & 12)				
	KEH067A41E Drain Pan Heater				
KKG067A41 Back protection wire net (09 & 12)		Back protection wire net (09 & 12)			
KPS067A41 Snow hood (intake side plate) (09 & 12)					
KPS067A42Snow hood (intake rear place) (09 & 12)					
	KPS067A44 Snow hood (outlet) (09 & 12)				
KKP937A4 Drain Plug for OD Unit					

# Standard Equipment

Part Number	Description		
6017766	Drain Pump		
2139531	Float Switch		

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056





Job Name:	
Tag#	



### FFQ15Q2VJU / RX15RMVJUA

1.25-Ton Ceiling Mounted Heat Pump System



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.* 

Indoor Specifications					
	Cooling			Heating	
Airflow Rate (cfm)	н		М	н	М
	420		367	441	385
	L		L		
	293		307		
Sound (dBA)	40	40 / 37 / 31		40 / 37 / 10	
H/M/L	40	/ 3	//31	40/3	//10
Dimensions (H × W × D) (in)		10-1/4 × 22-5/8 × 22-5/8		2-5/8	
Weight (Lbs)		36			

Outd	oor S	spec	cification	IS		
Compressor		Н	Hermetically Sealed Swing Type			
Refrigerant	Refrigerant		I	R-410A		
Factory Charge (Lbs)				2.49		
Refrigerant Oil		PVE (FVC50		(FVC50K)	ОК)	
Airflow Rate (cfm)		Cooling		Heating		
	н		2,313	н	2,108	
Sound Pressure Level (dBA)			ļ	50/51		
Dimensions (H × W × D) (in)		28-15/16 × 34-1/4 × 12-5/18				
Weight (Lbs)				97		
weight (Los) 97						

Efficiency					
Cooling Heating					
SEER	<b>R</b> 20.70 <b>HSPF</b>		11.0		
<b>EER</b> 12.5		СОР	3.86		

#### Performance

Cooling (Btu/hr)				
Rated (Min/Max) 14,400 (5,100 / 16,200)				
Sensible @ AHRI	9,820			
Standard Operating Range	50°F – 115°F			
Extended Operating Range*	-4°F — 115°F			
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB			

Outdoor: 95°F DB/75°F WB

\*With field settings and wind baffle

	0			
Heating (Btu/hr)				
1: @ 47° Rated (Min/Max)	16,200 (5,200 / 16,300)			
2: @ 17° Rated	10,600			
3: @ 5°	7,230			
Operating Range	5°F – 65°F			
1: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB			
	Outdoor: 47°F DB/43°F WB			
2: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB			
	Outdoor: 17°F DB/15°F WB			
3: Heating Conditions:	Indoor: 70°F DB/60°F WB			
	Outdoor: 5°F DB/5°F WB			


### Electrical

	208/60/1	230/60/1		
System MCA	9.7	9.7		
System MFA	15	15		
Compressor RLA	8.0	8.0		
Outdoor fan motor FLA	.31	.31		
Outdoor fan motor W	91	91		
Indoor fan motor FLA	.28	.28		
Indoor fan motor W	50	50		
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)				
RLA: Rated load amps (A) W: Fan motor rated output (W)				

Piping				
Liquid (in)	1/4			
Gas (in)	1/2			
Drain (in)	1-1/32			
Max. Interunit Piping Length (ft)	98.4			
Max. Interunit Height Difference (ft)	65.625			
Chargeless (ft)	32.8			
Additional Charge of Refrigerant (oz/ft)	.21			

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056


## FFQ15Q2VJU Dimensional Data

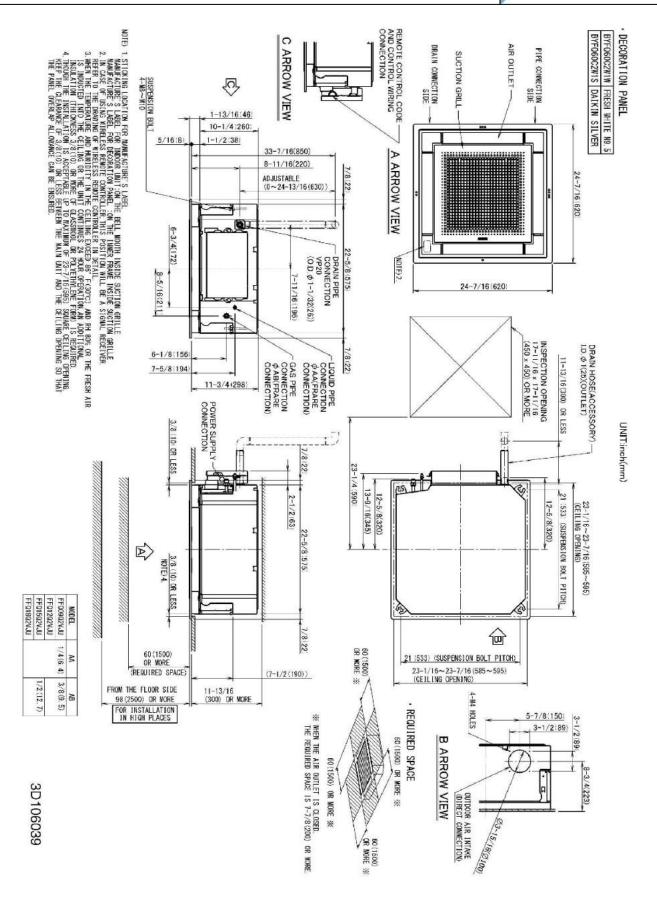

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056



## **RX15RMVJUA** Dimensional Data

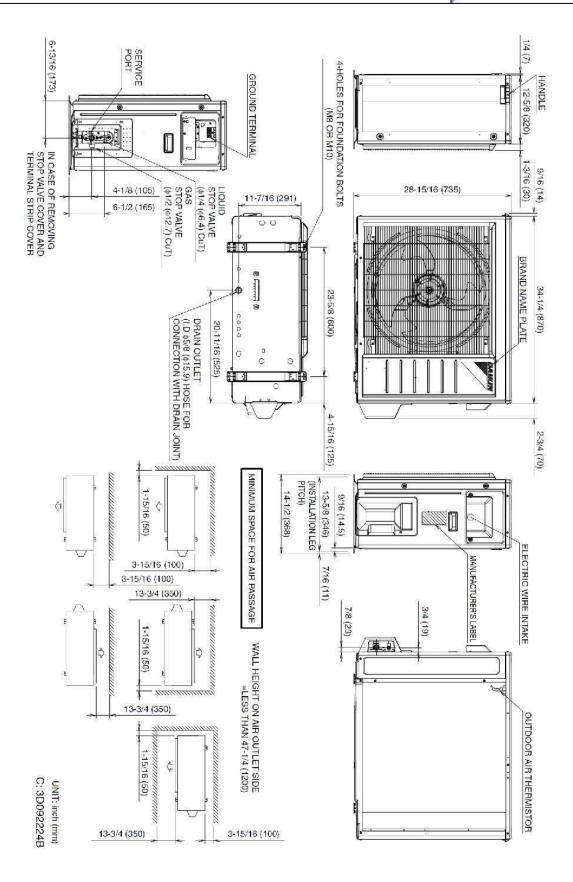

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056



# **Optional Accessories**

	Indoor Unit – One Controller & Decoration Panel are Required				
Included	Part Number	Description			
	BRC1E73 Wired Navigation Remote Controller				
	BRC082A42W	Wireless Remote Controller (White)			
	BRC082A42S Wireless Remote Controller (Silver)				
	BYFQ60C2W1S Low Profile Decoration Panel (Silver) - $1-\frac{13}{16} \times 24-\frac{7}{16} \times 24-\frac{7}{16}$				
	BYFQ60C2W1W Low Profile Decoration Panel (White) - $1-\frac{13}{16} \times 24-\frac{7}{16} \times 24-\frac{7}{16}$				
	BRYQ60A2S Sensor kit (Silver) Intelligent Eye, Comfort Airflow, and Floor Sensor				
	BRYQ60A2W	Sensor kit (White) Intelligent Eye, Comfort Airflow, and Floor Sensor			
	BDBHQ44C60	Sealing member of air discharge outlet			
	KAF441C60	Replacement Long Life Filter			
	DACA-CP2-1 Maxi Orange Condensate Pump				
	DACA-CP3-1 Mini Condensate Pump 5 gph				
	AZAI6WSCDKA DKN Cloud Wi-Fi Adaptor				

	Outdoor Unit					
Included	Included Part Number Description					
	DACA-WB-1 Powder-Coated Wall-Mounted Bracket					
	KPW063B4Low Ambient Wind Baffle /Air Adjustment Grille (15 & 18)					
KEH063A4E Drain Pan Heater						
KKG063A42Back protection wire net (15 & 18)		Back protection wire net (15 & 18)				
	KPS063A41Snow hood (intake side plate) (15 & 18)					
	KPS063A44 Snow hood (intake rear plate) (15 & 18)					
	KPS063A47 Snow hood (outlet) (15 & 18)					
	KKP937A4 Drain Plug for OD Unit					

## Standard Equipment

Part Number	Description
6017766	Drain Pump
2139531	Float Switch

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without





Job Name:	
Tag#	



### FFQ18Q2VJU / RX18RMVJU9A

 Data Sheet
 FFQ18Q2VJU

 1.5-Ton Ceiling Mounted Heat Pump System



Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.* 

Indoor Specifications						
	Cooling			Heating		
	Н		М	Н	М	
Airflow Rate (cfm)	448		378	498	420	
	Ĺ		Ĺ			
	275		307			
Sound (dBA) H / M / L	44 / 40 / 32		44 / 40 / 32			
Dimensions (H × W × D) (in)		10-1/4 × 22-5/8 × 22-5/8			2-5/8	
Weight (Lbs)				39		

. . . . .

Outd	oor S	spec	ification	IS	
Compressor		Н	Hermetically Sealed Swing Type		
Refrigerant		R-410A			
Factory Charge (Lbs)		2.49			
Refrigerant Oil	PVE (FVC50K)				
Airflow Rate (cfm)		Cooling		Heating	
Annow Rate (chin)	н		2,461	н	2,553
Sound Pressure Level (dBA)				54 / 55	
Dimensions (H × W × D) (in)		28-15/16 × 34-1/4 × 12-5/18			2-5/18
Weight (Lbs)				97	

Efficiency			
Cooling		Hea	ting
SEER	19.3	HSPF	10.10
EER	12.5	СОР	3.36

#### Performance

Cooling (Btu/hr)	
Rated (Min/Max)	17,400 (5,100 / 18,800)
Sensible @ AHRI	12,840
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-4°F — 115°F
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB

Outdoor: 95°F DB/75°F WB


\*With field settings and wind baffle

Heating (Btu/hr)		
1: @ 47° Rated (Min/Max)	21,600 (5,400 / 21,800)	
2: @ 17° Rated	14,200	
3: @ 5°	9,610	
Operating Range	5°F – 65°F	
1: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB	
	Outdoor: 47°F DB/43°F WB	
2: Rated Heating Conditions:	Indoor: 70°F DB/60°F WB	
	Outdoor: 17°F DB/15°F WB	
3: Heating Conditions:	Indoor: 70°F DB/60°F WB	
	Outdoor: 5°F DB/5°F WB	

Electrical		
	208/60/1	230/60/1
System MCA	12.8	12.8
System MFA	15	15
Compressor RLA	10.75	10.75
Outdoor fan motor FLA	.38	.38
Outdoor fan motor W	110	110
Indoor fan motor FLA	.28	.28
Indoor fan motor W	50	50
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)		
RLA: Rated load amps (A) W	: Fan motor rate	d output (W)


Piping		
Liquid (in)	1/4	
Gas (in)	1/2	
Drain (in)	1-1/32	
Max. Interunit Piping Length (ft)	98.4	
Max. Interunit Height Difference (ft)	65.625	
Chargeless (ft)	32.8	
Additional Charge of Refrigerant (oz/ft)	.21	

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

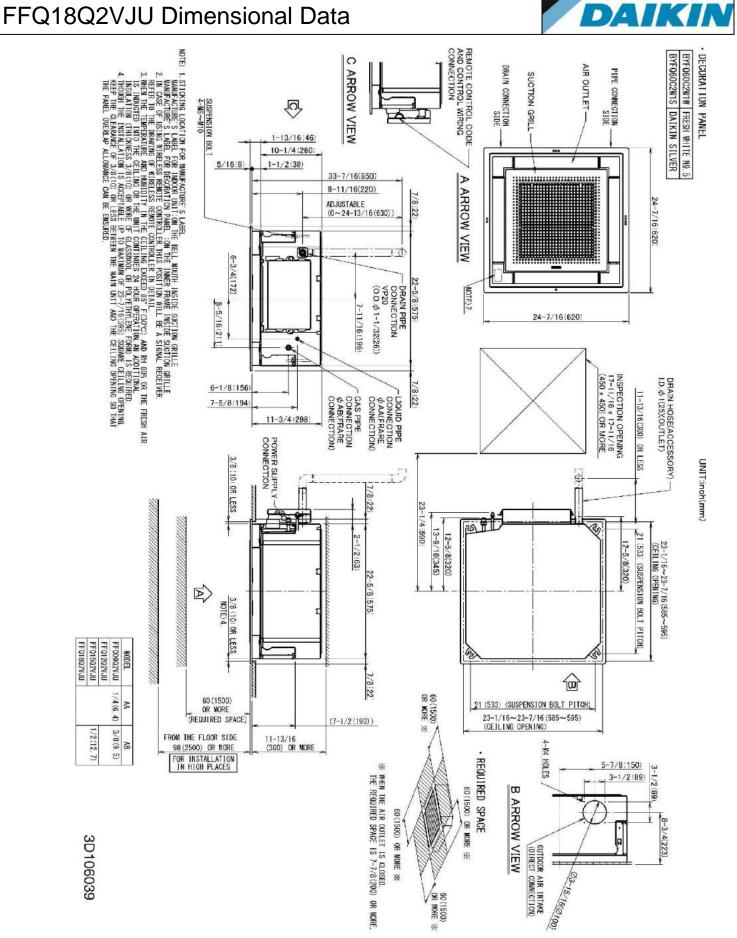

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

### RX18RMVJU9A Dimensional Data

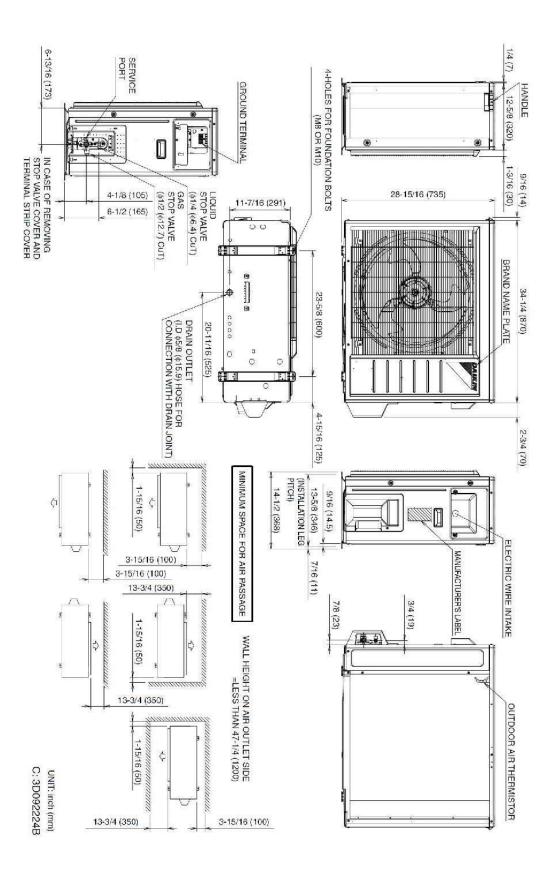

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056



# **Optional Accessories**

	Indoor Unit – One Controller & Decoration Panel are Required		
Included	eluded Part Number Description		
	BRC1E73	Wired Navigation Remote Controller	
	BRC082A42W	Wireless Remote Controller (White)	
	BRC082A42S	Wireless Remote Controller (Silver)	
	BYFQ60C2W1S	Low Profile Decoration Panel (Silver) - $1-\frac{13}{16} \times 24-\frac{7}{16} \times 24-\frac{7}{16}$	
	BYFQ60C2W1W	Low Profile Decoration Panel (White) - $1-\frac{13}{16} \times 24-\frac{7}{16} \times 24-\frac{7}{16}$	
	BRYQ60A2S	Sensor kit (Silver) Intelligent Eye, Comfort Airflow, and Floor Sensor	
	BRYQ60A2W	Sensor kit (White) Intelligent Eye, Comfort Airflow, and Floor Sensor	
	BDBHQ44C60	Sealing member of air discharge outlet	
	KAF441C60	Replacement Long Life Filter	
	DACA-CP2-1	Maxi Orange Condensate Pump	
	DACA-CP3-1	Mini Condensate Pump 5 gph	
	AZAI6WSCDKA	DKN Cloud Wi-Fi Adaptor	

	Outdoor Unit		
Included	Part Number	Description	
	DACA-WB-1	Powder-Coated Wall-Mounted Bracket	
	KPW063B4	Low Ambient Wind Baffle /Air Adjustment Grille (15 & 18)	
	KEH063A4E	Drain Pan Heater	
	KKG063A42	Back protection wire net (15 & 18)	
	KPS063A41	Snow hood (intake side plate) (15 & 18)	
	KPS063A44	Snow hood (intake rear plate) (15 & 18)	
	KPS063A47	Snow hood (outlet) (15 & 18)	
	KKP937A4	Drain Plug for OD Unit	

# Standard Equipment

Part Number	Description
6017766	Drain Pump
2139531	Float Switch

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056



