

Job Name:	
Tag#	



Submittal Data Sheet	FTXS30LVJU / RKS30LVJU
2.5-Ton Wall Mounted Cooling Only System	



Efficiency	
Cooling	
SEER	19.3
EER	10.7

Performance	
Cooling (Btu/hr)	
Rated (Min/Max)	30,000 (10,200 / 30,000)
Sensible @ AHRI	19,940
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-40°F – 115°F
Rated Cooling Conditions: Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB	
*With optional ultra low-ambient kit	

Complete warranty details available from your local dealer or at www.daikincomfort.com. Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

Indoor Specifications		
Airflow Rate (cfm)	Cooling	
	H	M
	706	611
	L	SL
519	473	
Sound (dBA) H / M / L / SL	47 / 45 / 40 / 37	
Dimensions (H x W x D) (in)	13-3/8 x 47-1/4 x 9-7/16	
Weight (Lbs)	38	

Electrical		
	208/60/1	230/60/1
System MCA	19.5	19.5
System MFA	20	20
Compressor RLA	13.5	12.2
Outdoor fan motor FLA	.39	.35
Outdoor fan motor W	200	200
Indoor fan motor FLA	.37	.34
Indoor fan motor W	64	64
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A) RLA: Rated load amps (A) W: Fan motor rated output (W)		


Outdoor Specifications		
Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Factory Charge (Lbs)	6.17	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	H	2,627
Sound Pressure Level (dBA)	54	
Dimensions (H x W x D) (in)	38-15/16 x 37 x 12-5/8	
Weight (Lbs)	179	

Piping	
Liquid (in)	3/8
Gas (in)	5/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32
Additional Charge of Refrigerant (oz/ft)	.54

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


FTXS30LVJU Dimensional Data

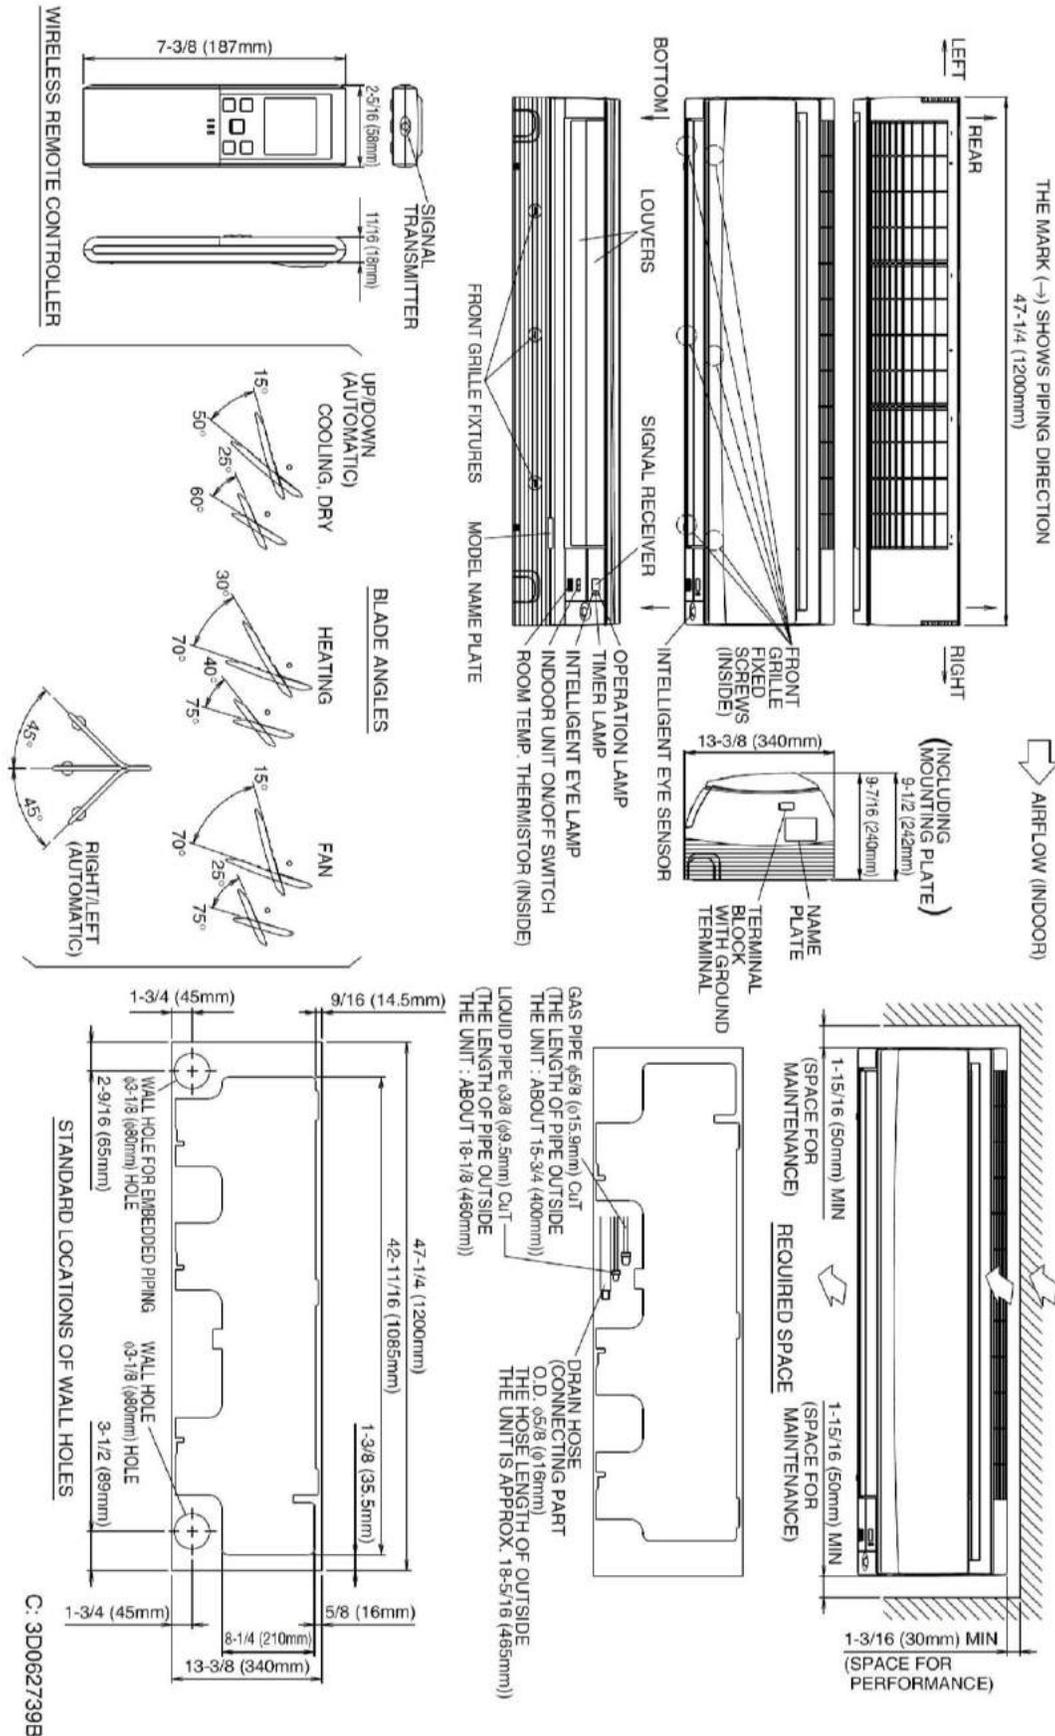

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

RKS30LVJU Dimensional Data

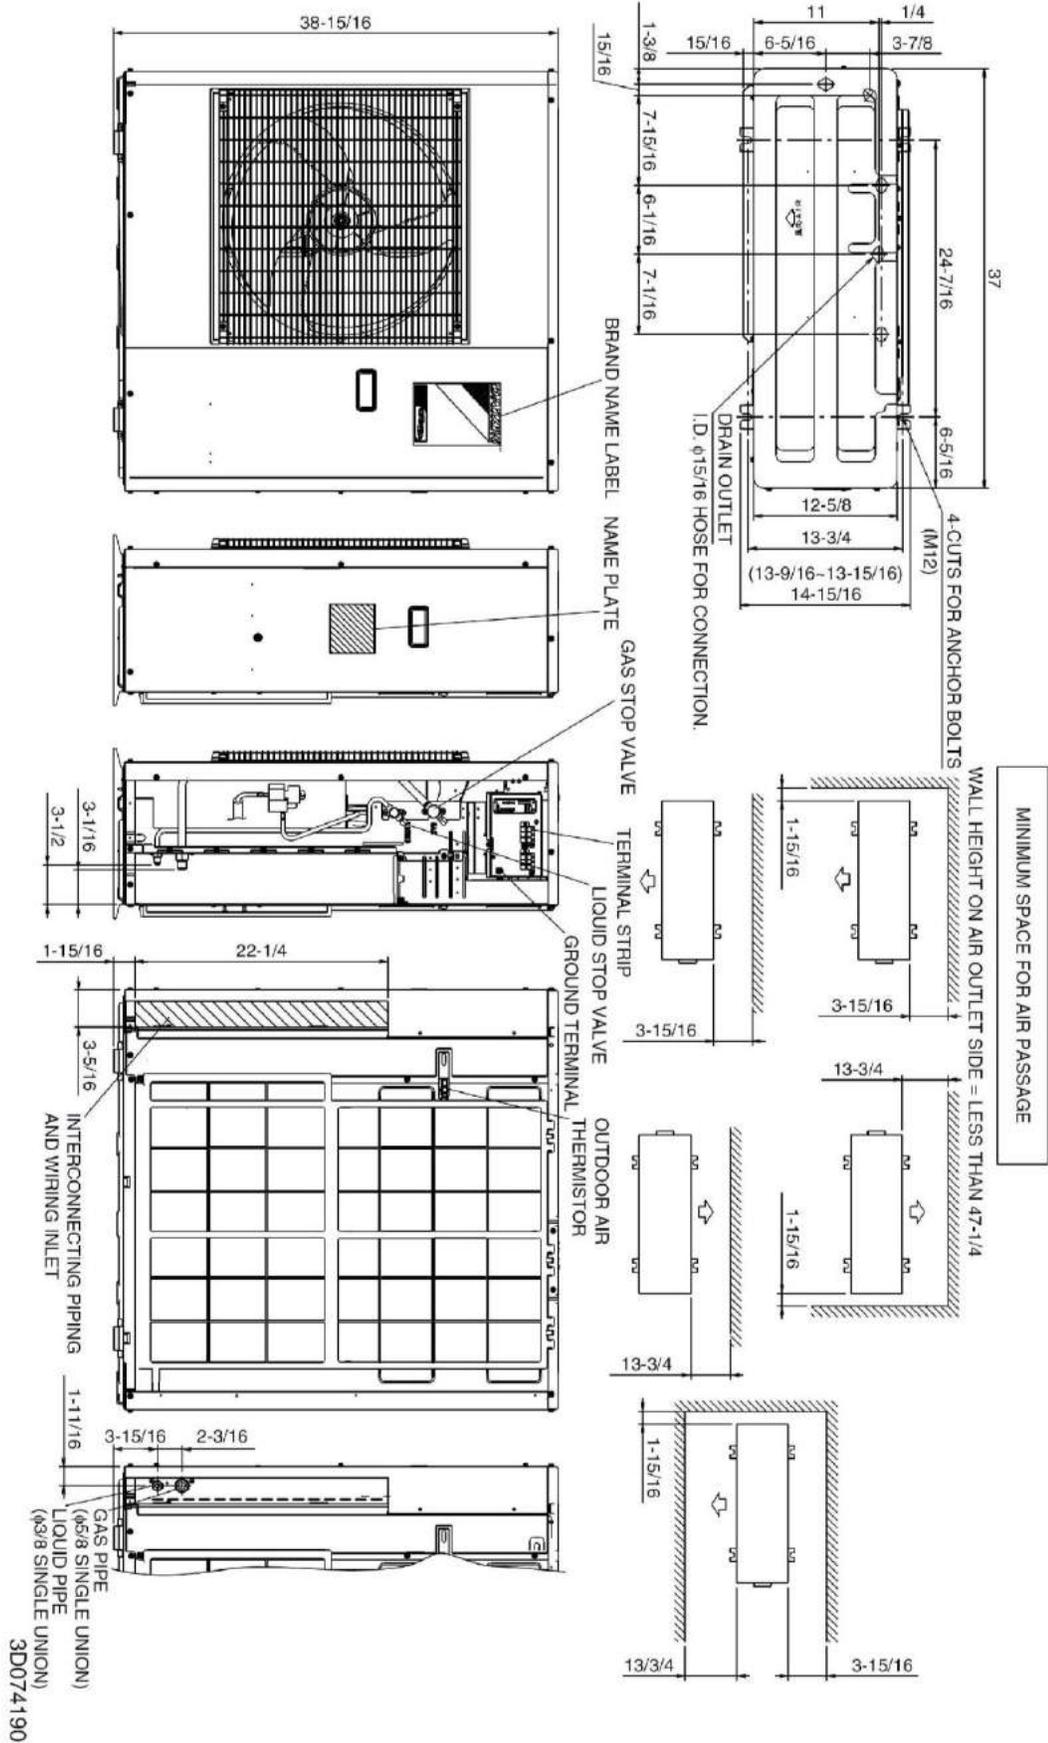

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Indoor Unit – Controller Required

Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller
	BRCW901A03	Wired Remote Controller Cable – 10ft
	BRCW901A08	Remote Controller Cable – 25ft
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S	Interface Adaptor for DIII-NET

Outdoor Unit

Included	Part Number	Description
	KPW5G112	Air Adjustment Grille
	KKG063A42	Back protection wire net
	KEHC082A41	Ultra Low Ambient Kit

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Job Name:	
Tag#	



Submittal Data Sheet	FTXS36LVJU / RKS36LVJU
3-Ton Wall Mounted Cooling Only System	



Efficiency	
Cooling	
SEER	17.9
EER	8.35

Performance	
Cooling (Btu/hr)	
Rated (Min/Max)	36,000 (10,200 / 36,000)
Sensible @ AHRI	22,890
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-40°F – 115°F
Rated Cooling Conditions:	
Indoor:	80°F DB/67°F WB
Outdoor:	95°F DB/75°F WB
* With optional ultra low-ambient kit	

Complete warranty details available from your local dealer or at www.daikincomfort.com. Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

Indoor Specifications		
Airflow Rate (cfm)	Cooling	
	H	M
	770	635
	L	SL
519	473	
Sound (dBA) H / M / L / SL	49 / 45 / 40 / 37	
Dimensions (H x W x D) (in)	13-3/8 x 47-1/4 x 9-7/16	
Weight (Lbs)	38	

Electrical		
	208/60/1	230/60/1
System MCA	19.5	19.5
System MFA	20	20
Compressor RLA	18.9	18.4
Outdoor fan motor FLA	.39	.35
Outdoor fan motor W	200	200
Indoor fan motor FLA	.37	.34
Indoor fan motor W	64	64
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)		
RLA: Rated load amps (A) W: Fan motor rated output (W)		


Outdoor Specifications		
Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Factory Charge (Lbs)	6.17	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	H	2,627
Sound Pressure Level (dBA)	54	
Dimensions (H x W x D) (in)	38-15/16 x 37 x 12-5/8	
Weight (Lbs)	179	

Piping	
Liquid (in)	3/8
Gas (in)	5/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32
Additional Charge of Refrigerant (oz/ft)	.54

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


FTXS36LVJU Dimensional Data

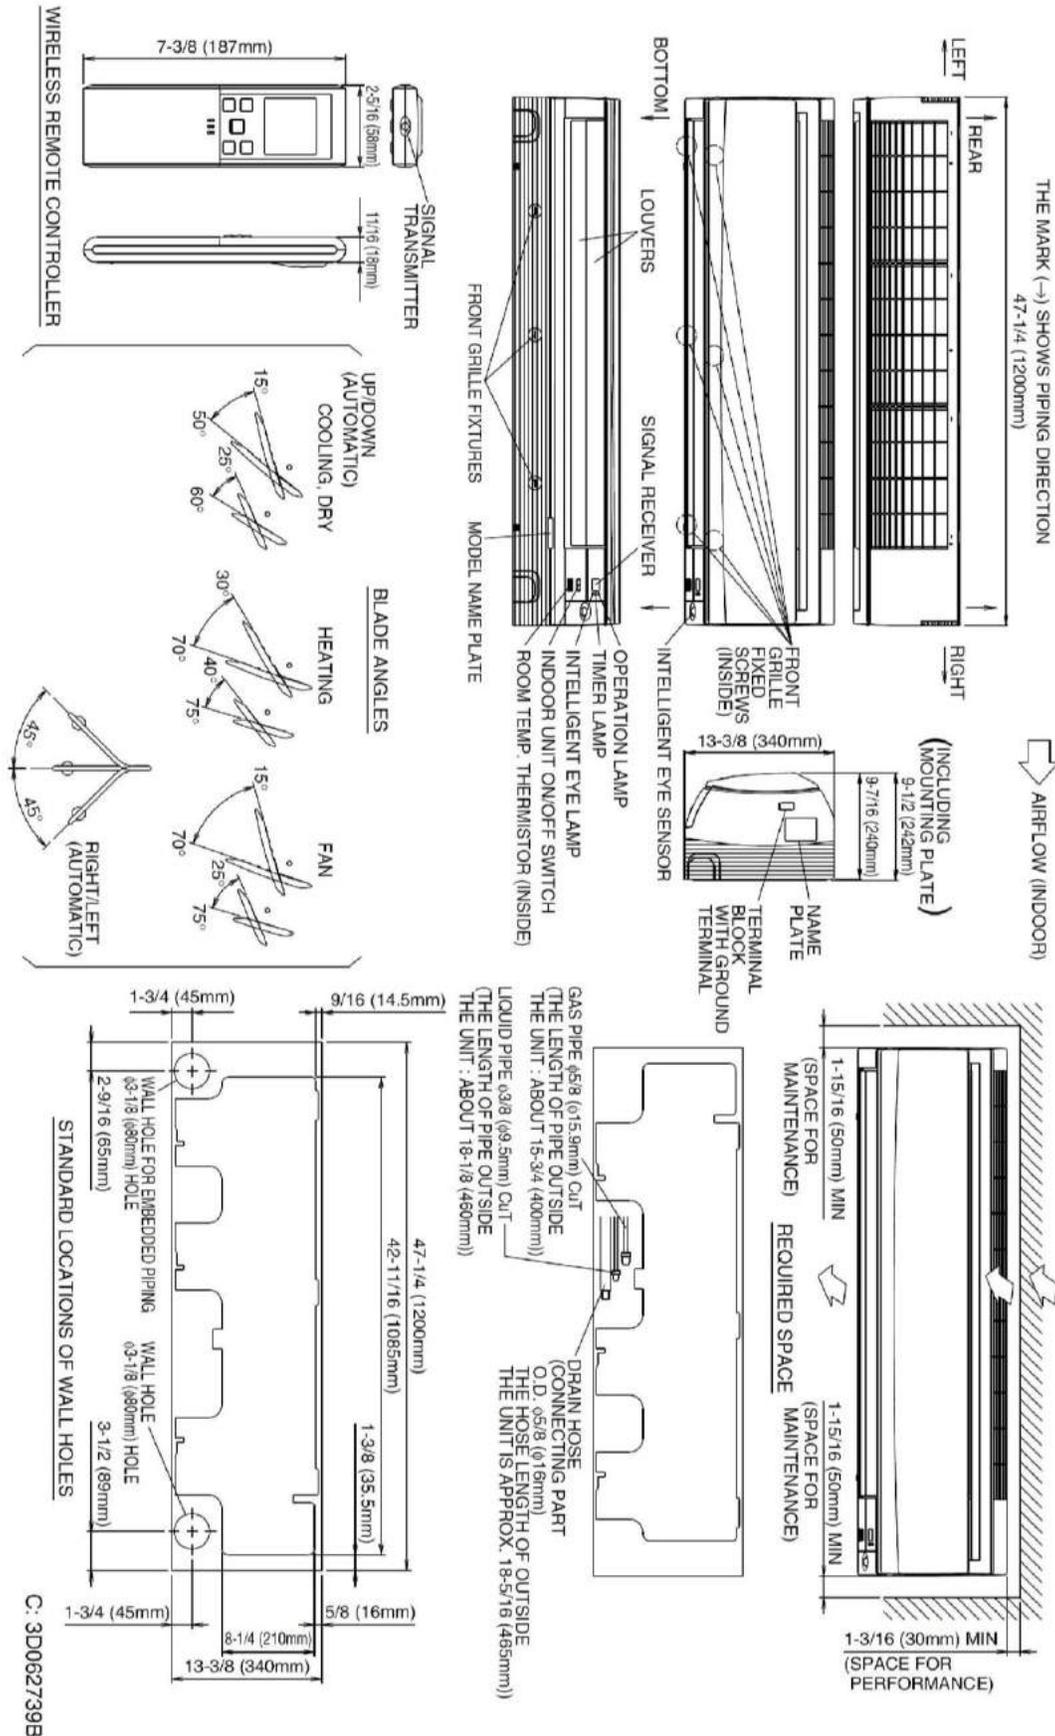

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

RKS36LVJU Dimensional Data

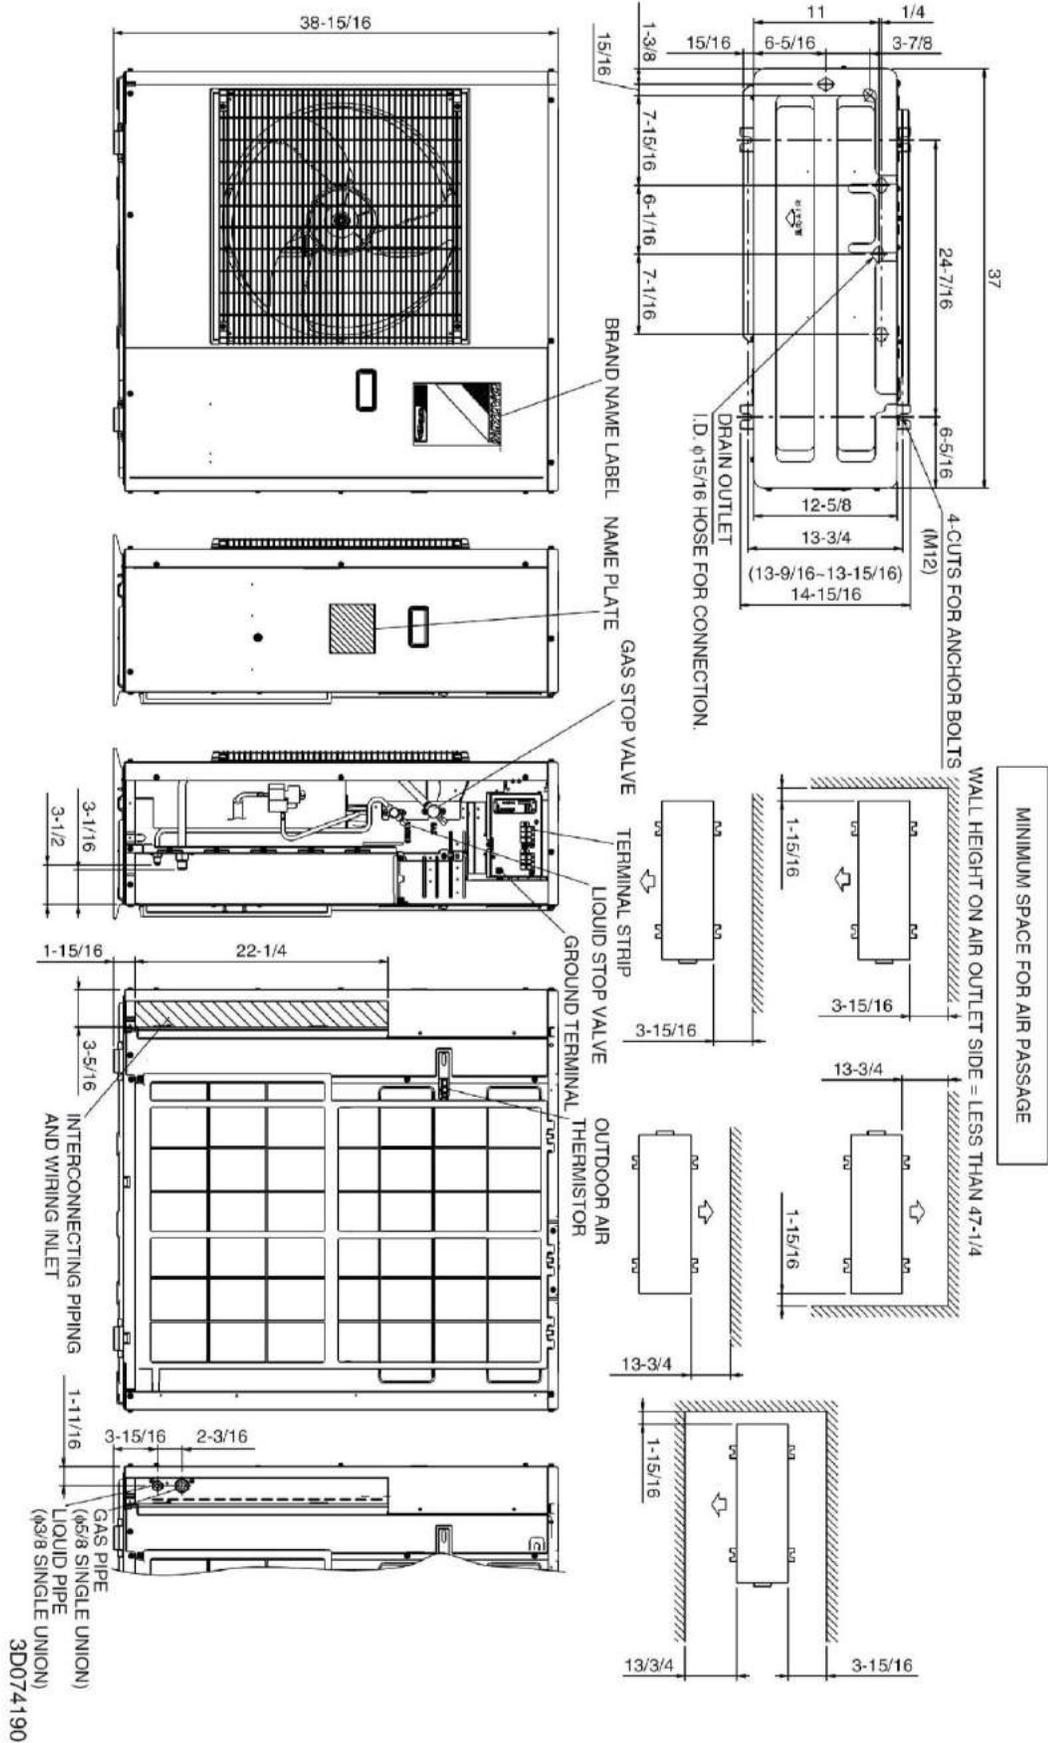

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Indoor Unit – Controller Required		
Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller
	BRCW901A03	Wired Remote Controller Cable – 10ft
	BRCW901A08	Remote Controller Cable – 25ft
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S	Interface Adaptor for DIII-NET

Outdoor Unit		
Included	Part Number	Description
	KPW5G112	Air Adjustment Grille
	KKG063A42	Back protection wire net
	KEHC082A42	Ultra Low Ambient Kit