









- PIAGGIO LIBERTY 150
- Instrument panel with LCD colour display
- ABS only on the front wheel on 125 and 150 cc
- Air-cooled i-get engines with electronic injection and 3 valves on all sizes
- · Spacious under-seat compartment
- LED front and rear lights
- New aluminium luggage rack that can hold a 32 L top box
- Front compartment for storing small items
- Low, easily accessible seat and pull-out passenger footrests for greater comfort

PIAGGIO LIBERTY 50 S PIAGGIO LIBERTY 150 S




- Glossy black finish
- Dark rims
- Blue details on rims and front steering cover



3 /400


PIAGGIO BV 400 S



- · Modern, dynamic design
- 400 hpe with ABS/ASR system
- · Suspension compartment for greater stability and comfort
- Keyless system
- Full LED lighting
- · Fully digital instrument cluster
- Spacious under-seat compartment that can hold 1 modular helmet and other items. Storage compartment with built-in USB port
- Top fairing as standard on 400 hpe
- Piaggio MIA connectivity system as standard on 400 hpe
- Smart, sophisticated style: range of glossy colours, black seat with double material and double tone-on-tone stitching
- Metallic finishes and light grey wheel rims
- Sporty style with black seat with double material and double contrast stitching
- Graphite-effect finishes and dark grey wheel rims



ACCESSORIES & LIFESTYLE

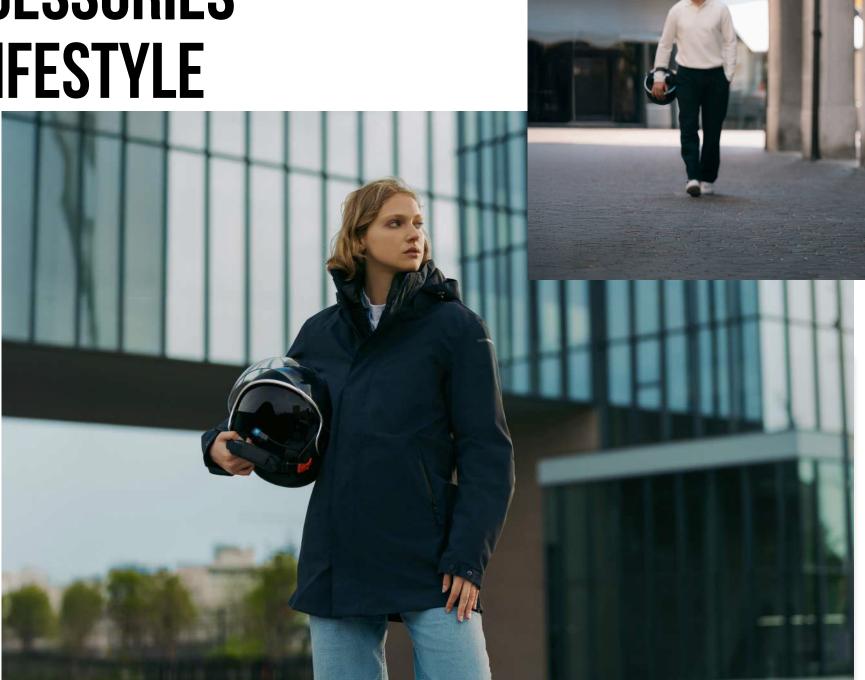

Choose original accessories to make your Piaggio scooter truly unique. Make your journey the best part of your day. Find out more at www.piaggio.com

	Piaggio 1 Active	
Engine	Electric hub motor	
Battery	2,0 kWh	
Voltage	48 V	
Capacity	42 Ah	
Power	2,7 kW (3,0 kW peak)	
Max Speed	60 km/h	
Torque	95 Nm	
Cooling	Air	
Starter	Keyless	
Chassis	Single cradle structure of steel tubes and stamped sheet metal	
Front suspension	Single-sided suspension (single shock absorber)	
Rear suspension	Double hydraulic shock absorber	
Front brake	Disc Ø 175 mm (Combined Braking System front and rear,	
Rear brake	CBS) Disc Ø 175 mm (Combined Braking System front and rear,	
Front tyre	CBS) Tubeless 100/80 - 10"	
Rear tyre	Tubeless 100/80 - 10"	
Seat height	770 mm	
Range ECO	80 km*	
Length / Width / Height to Wheelbase	1.680 mm / 750 mm / 1.220 mm	
Weight (without battery)	79 kg	
Battery weight	15 kg	
Emissions compliance	Euro 5+	

^{*}The measured data are based on road test at constant speed ("wide open throttle") and can be affected by different conditions such as load, temperature, wind speed, road surface and operating habits. Battery capacity may decay up to 20% due to different factors such as number of recharging cycles and battery usage.

	Piaggio MP3 530 hpe Exclusive
Engine	Single-Cylinder, four-stroke hpe
Engine capacity	530 cc
Bore x Stroke	97,5 mm x 71 mm
Max Power	44 hp @ 7,250 rpm
Max Torque	37.6 ft-lb @ 5,250 rpm
Valve train	Single overhead cam shaft (SOHC), 4 valves
Fuel system	Electronic injection
Cooling system	Liquid
Front suspension	Double wheels with oscillating arms
Rear suspension	Coil springs and shock absorbers
Braking system	ABS - CBS with ASR
Front brake	Dual 258 mm discs
Rear break	Single 240 mm disc
Tires	Front 110/70-13" (x2) Rear 140/70-14"
Length / Width / Height to Wheelbase	85 in / 32 in / 61 in
Fuel tank capacity	3.6 gal
Reported fuel consumption	57.4 mpg
Reported CO ₂ emissions	57.4 mpg
Gross vehicle weight	617 lbs
Emissions class	Euro 5+

	Piaggio BV400 S hpe	
Engine	Single cylinder 4-stroke, 4 valves	
Engine capacity	399 cc	
Bore x Stroke	84 mm x 72 mm	
Max Power	34 hp @ 7,500 rpm	
Max Torque	28.7 ft-lb @ 5,700 rpm	
Consumption (WMTC cycle)	n.d.	
CO2 emissions	n.d.	
Valve train	Single overhead camshaft (SOHC) - 4 valves	
Fuel system	Electronic injection	
Cooling	Liquid	
Starter	Electric	
Transmission	Automatic CVT	
Clutch	Oil bath automatic centrifugal multiplate clutch	
Frame	Double cradle tubular pipe in high strength steel	
Front suspension	Hydraulic telescopic fork	
Rear suspension	Dual, double action hydraulic shock absorber, adjustable preload	
Front brake	Disc Ø 300 mm	
Rear brake	Disc Ø 240 mm	
Braking system	ABS/ASR	
Front tire	Tubeless 120/70 - 16"	
Rear tire	Tubeless 150/70 - 14"	
Length / Width / Height to Wheelbase	84.8 in / 31.5 mm / 61 mm	
Fuel tank capacity	3.17 gal	
Emissions class	Euro 5+	

	Piaggio Liberty 50 i-get Piaggio Liberty 50 S i-get	Piaggio Liberty 150 i-get Piaggio Liberty 150 S i-get
Engine	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get
Engine capacity	49 cc	155 cc
Bore x Stroke	39 mm x 41,4 mm	58 mm x 58,6 mm
Max Power	2.9 hp @ 7,500 rpm	12.7 hp @ 7,750 rpm
Max Torque	2.2 ft-lb @ 6,500 rpm	9.5 ft-lb @ 6,750 rpm
Consumption (WMTC cycle)	94.1 mpg	81 mpg
CO ₂ emissions	95 mpg	86 mpg
Valve train	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)
Fuel system	Electronic injection	Electronic injection
Cooling	Air	Air
Starter	Electric	Electric
Transmission	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	High resistance tubular steel	High resistance tubular steel
Front suspension	Telescopic hydraulic fork	Telescopic hydraulic fork
Rear suspension	Single hydraulic shock absorber with 5-position preload adjustment	Single hydraulic shock absorber with 5-position preload adjustment
Front / Rear brake	Disc Ø 240 mm / Drum Ø 140 mm	Disc Ø 240 mm / Drum Ø 140 mm
ABS	-	ABS at the front wheel only
Front tire	Tubeless 90 / 80 - 16"	Tubeless 90 / 80 - 16"
Rear tire	Tubeless 100 / 80 - 14"	Tubeless 100 / 80 - 14"
Length / Width / Height to Wheelbase	76 in / 28 in / 54 in 30 in	76 in / 28 in / 54 in 31 in
Fuel tank capacity	1.5 gal	1.5 gal
Emissions class	Euro 5	Euro 5+

