

PLUMBING

Hoses and fillers.....	146
Tanks and accessories	149
Pumps.....	152
Plumbing fittings	157
Hot water heaters.....	162
Filtration.....	164
Sinks and basins.....	165
Tapware	168
Bathroom accessories	173
Bathroom modules.....	174
Gas compliance and safety.....	175
Gas fittings and adaptors.....	178
Gas cylinders and accessories.....	179
Gas regulators and hoses	186





HOSES AND FILLERS



CAMEC LOCKABLE WATER FILLER
 039945 WHITE RIGHT HAND HINGE
 039946 BLACK RIGHT HAND HINGE
 040269 WHITE LEFT HAND HINGE
 040270 BLACK LEFT HAND HINGE

Lockable water filler supplied with 2 keys.

FEATURES:

- One piece filler neck
- Lockable water filler supplied with two keys
- Camec One Key Fits All barrel housing
- Available in both left and right hand hinged flap
- Flap opens 180° to be flush with the RV wall
- Emergency opening feature from the inside

SPECIFICATIONS:

- 10mm barb on breather
- 25mm barb on filler neck




CAP AND KEY - LOCKABLE WATER FILLER
 006160 WHITE
 006161 BLACK
 Available in black and white.



WATER FILLER COMPLETE - AC41
 006173
 006174 FLAP ONLY
 Plastic water filler with hinged flap.



FIAMMA LOCKABLE WATER FILLER
 006169 BLACK
 006170 WHITE
 Locking water cap.



SHURFLO CITY WATER ENTRY PRESSURE REGULATOR - WALL MOUNTED
 006154 - WHITE
 006155 - WHITE RETAIL PACK
 006156 - CHROME
 006158 - CHROME RETAIL PACK
 043432 - BLACK
 043433 - BLACK RETAIL PACK

Combined mains pressure water entry, pressure regulator and check valve. Reduces mains pressure to 50psi.

FEATURES:

- Leak tight, stress and crack resistant
- Quick, easy wall mount

SPECIFICATIONS:

- Water pressure is limited to 50psi



RECESS WATER FILLER AND CAP
 006176
 To suit Camec water tanks.
 • White



CAP ONLY TO SUIT FIAMMA WATER FILLER
 043326 WHITE
 043327 BLACK
 With key.



CAMEC CURLY COIL HOSE
043223

Camec has tamed the drinking water hose. Coil design - able to be gathered and stored easily in the supplied bag.

FEATURES:

- Drinking water approved
- Conforms to AS/NZS4020
- Only contains high quality food grade compounds compliant to FDA 21 CFR 177.1520C
- Durable, flexible and reinforced for standard tap pressures
- Non-toxic, safe and clean
- Complete with standard brass garden tap fittings

SPECIFICATIONS:

- 10 usable metres
- Weight: 2.1kg



CAMEC DRINKING WATER HOSE

- 005303 - 12MM ID X 10M
- 005301 - 12MM ID X 20M
- 005304 - 12MM ID X 100M (SOLD PER METRE)

Non toxic, no taste. Hose will not taint the water.

SPECIFICATIONS

- Plastic fittings attached for easy connection to a garden tap on 10m and 20m rolls
- Weight: 10m - 1.3kg
- Weight: 20m - 2.11kg



FLUTED WASTE/SULLAGE HOSE

- 044459 - 25MM X 10M RETAIL PACK
- 005284 - 25MM X 20M SMOOTH BORE
- 005280 - 25MM X 30M NON SMOOTH BORE
- 043365 - 28MM X 10M SMOOTH BORE
- 044072 - 32MM X 20M SMOOTH BORE REINFORCED - SOLD PER METRE
- 005282 - 40MM X 20M SMOOTH BORE REINFORCED - SOLD PER METRE

This hose uses nitrile to minimise the permeation of odours through the hose when used with sanitation systems in boats, caravans and recreational vehicles.

FEATURES:

- Excellent UV resistance to withstand extreme Australian conditions
- Ribbed outer cover provides superior resistance to abrasion
- Recommended for all air and water applications where a long lasting hose is required
- Black



HOSE BAG

- 044486 SMALL
- 044485 LARGE

Small bag holds 10m of fresh or 5m of sullage hose. Large bag holds 20m of fresh or 10m of sullage hose.



CLEAR VINYL FOODGRADE HOSE

- 035559 - 10MM X 50M X 1.6MM WALL - SOLD IN ROLLS ONLY
- 005272 - 12MM X 30M X 2MM WALL - SOLD IN ROLLS ONLY
- 005274 - 25MM X 30M X 3.5MM WALL (SOLD PER METER)

Ideal for RV plumbing and many other applications. Clear hose is best used in areas not exposed to light.



BLACK VINYL HOSE FOODGRADE

- 005267 - 12.5MM X 30M X 2MM WALL
- 005269 - 25MM X 30M X 3.5 WALL

Ideal for RV plumbing and many other applications.

FEATURES:

- Complies with Australian standards
- Use where plumbing may be exposed to light to reduce algae growth

SPECIFICATIONS:

- Internal diameters of 12.5 and 25mm
- Will withstand temperatures from -10°C up to 60°C
- Smooth bore and outer surface

HOSES AND FILLERS



FLOOR SEAL WHITE
040868

SPECIFICATIONS:

- White
- To suit hose 10-19mm outer diameter
- Pack of 100



HOSE FLAT DRINKING WATER

005309 - FLAT DRINKING WATER HOSE 10 METRE

005310 - FLAT DRINKING WATER HOSE 15 METRE

005313 - REPLACEMENT COMPACT REEL

Ideal for connection to caravans and motorhomes using snap-on high quality brass fittings.

FEATURES:

- High flow
- Food grade liner
- Solid brass fittings
- Tangle free storage
- Complete with compact reel

SPECIFICATIONS:

- Internal diameter of 19mm, which provides a high flow
- Weight: 10m - 2.05kg
- Weight: 15m - 3.0kg
- Weight: Replacement reel: 580g



HOSE FLAT SULLAGE

038685 - FLAT SULLAGE HOSE 6M 25MM ID

005315 - FLAT SULLAGE HOSE 9M 25MM ID

005316 - FLAT SULLAGE HOSE 9M 32MM ID

For general use on caravans and motorhomes.


FEATURES:

- For grey water disposal
- Smooth surface for easy cleaning
- No seeping
- Save on space
- Complete with multi reel

SPECIFICATIONS:

- Weight: 6m - 2.15kg
- Weight: 9m - 2.5kg

TYPICAL PLUMBING INSTALLATION

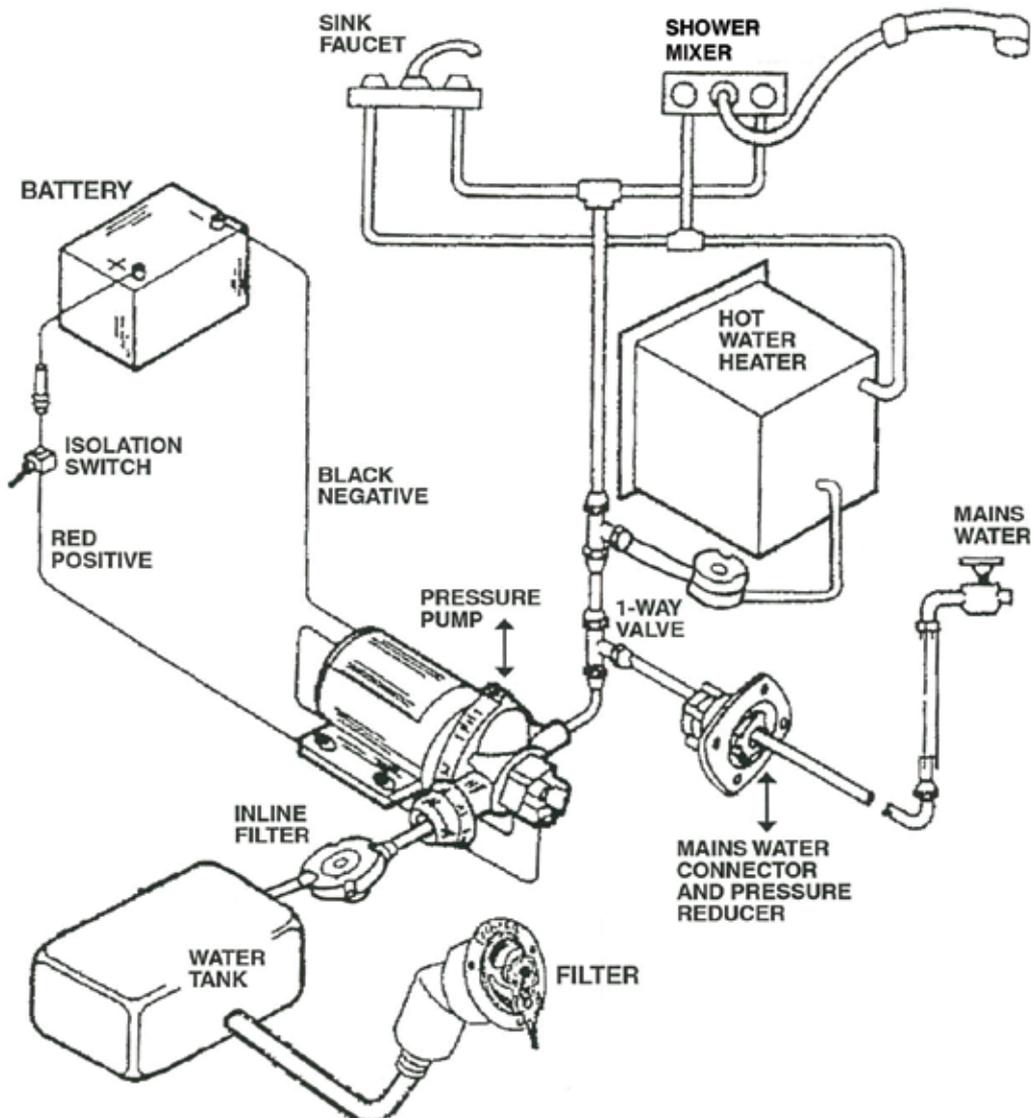



CAMEC WATER TANK

033422 - 59 LITRE 840 X 490 X 190
033423 - 82 LITRE 1190 X 490 X 190

Plastic fresh water tank, tough, non-toxic. Used by Australian caravan manufacturers.

FEATURES:

- High density polyethylene
- Foodgrade

SPECIFICATIONS:

- Tank comes with two 1/2" BSP plugs
- Outlets are 2 x 1/2" female BSP
- Inlet 25mm barb
- 006083 Screw in breather to suit (not included)



ROTO 61 LITRE ROUND CORNER WATER TANK

006097

Plastic, tough, non toxic, fresh water round corner tank for caravans and recreational vehicles.

FEATURES:

- Australian made from food contact approved resin

SPECIFICATIONS:

- Dimensions: 895mm(l) x 480mm(w) x 165mm(d)
- Capacity: 61 litre (13 gallons)
- Outlet: 1/2" barb
- Inlet: 1" barb
- Drilled breather hole



ROTO 70 LITRE WATER TANK (NO BARBS)

006099

Plastic fresh water tank for caravans and recreational vehicles.

FEATURES:

- Australian made from food contact approved polyethylene

SPECIFICATIONS:

- Dimensions: 850mm(l) x 510mm(w) x 160mm(d)
- Capacity: 70 litre (15 gallons)
- No barbs
- Inlet 3/4" F thread
- Outlet 3/8" F thread
- Small drilled breather hole



50 LITRE UNIVERSAL CARAVAN & RV WATER TANK/WASTE TANK

044267

Blow moulded universal caravan and RV water tank which can be configured in many ways to provide a single low cost solution to your water or grey water storage requirements. Blow moulded from food contact approved high molecular weight high density polyethylene. This makes the tank a super tough performer. The tank is moulded with two integral 40mm (1 1/2" BSP) threaded female closures that can accept a wide variety of standard fixtures and fittings. Using these standard fittings the tank can be networked together to provide many water storage options for your vehicle. When installation configuration has been chosen, drill a 3-4mm hole in the top of each tank to allow for air venting.

SPECIFICATIONS:

- Weight: 2.5kg
- 1 1/2" BSP
- Dimensions: 698mm(l) x 210mm(d) x 382mm(w)



ROTO CAMPER 55 LITRE WATER TANK (NO BARBS)

006096

Plastic fresh water tank for caravans and recreational vehicles.

FEATURES:

- Australian made from food contact approved resin

SPECIFICATIONS:

- Dimensions: 760mm(l) x 350mm(h) x 230mm(d)
- Capacity: 55 litre (12 gallons)
- Can be installed vertically or horizontally
- No barbs



AL-KO 52 LITRE WATER TANK

006089

Plastic, tough, non toxic fresh water tank for caravans and recreational vehicles.

FEATURES:

- Has two small drilled breather holes (no thread) on the upper corner of the tank
- The top also has two tapered red plastic push in bungs that cover holes left from the manufacturing process

SPECIFICATIONS:

- Dimensions: 1010mm(l) x 175mm(h) x 330mm(w)
- Capacity: 52 litres (11.5 gallons)



MODULAR 43 LITRE WATER TANK

043394 - 43 LITRE WATER TANK

043708 - A LINK TANK

043709 - B LINK TANK

043410 - CAP

043411 - ELBOW

043412 - REDUCING SOCKET 25-20MM FBSP

043414 - ADAPTOR 20MM FBSP TO 15 MBSP

043426 - TEE FITTING 20MM FBSP

The modular caravan and RV tank is blow moulded from food contact approved, high molecular weight, high density polyethylene. This makes the tank a super tough performer. Moulded with two integral 20mm (3/4 MBSP) threads that can accept a wide variety of standard fixtures and fittings. Using these standard fittings, the tanks can be networked together to provide almost limitless water storage options for your vehicle.

SPECIFICATIONS:

- 3/4 (20mm) MBSP
- Dimensions: 260mm(w) x 220mm(d) x 860mm(l)



ROTO WATER TANK

006100

84L

Plastic, tough, non toxic standard fresh water tank for caravans and recreational vehicles.

FEATURES:

- Australian made from food contact approved resin
- 850L x 525W x 220H



FIAMMA 70 LITRE WATER TANK

006110

Fiamma fresh water tank is made of non-toxic material and can be installed either horizontally or vertically.

FEATURES:

- Very flexible and good quality water tank for use in campervan or motorhome
- Has clamps to install against wall (vertical) or on floor (horizontal) and the water outlet can be fitted in any one of six positions
- Complete with all installation fittings

SPECIFICATIONS:

- Dimensions: 700mm(l) x 240mm(h) x 470mm(d)

TANKS AND ACCESSORIES



WATER TANK BRACKETS

- 044379 FOR 50 LITRE
- 035609 FOR 55 & 61 LITRE
- 043970 FOR 59 & 82 LITRE
- 035610 FOR 70 LITRE
- 035611 FOR 77 LITRE
- 035612 FOR 83 LITRE
- 035613 FOR 106 LITRE



WATER TANK PROTECTOR

- 034578 - FOR 59 LITRE 900 X 850
- 034579 - FOR 82 LITRE 1250 X 850



CAMEC TANK BARB OUTLET DRILLED

006079
To suit Camec water tanks.

SPECIFICATIONS:
1/2" BSP x 3/8" BSP



TANK CLEEN 200G

000261
Cleans and deodorises freshwater tanks.

FEATURES:

- An effective remedy for water tainting problems
- Treats up to 182 litres

SPECIFICATIONS:

- 200gm



CAMEC WATER TANK DRAIN TAP

043772
To suit Camec water tanks.

SPECIFICATIONS:

- 3/8" BSPM x 1/2" male barb



BREATHER 10MM BARB X 3/4" MALE

BSP
006083



PLASTIC BUSH 1/2" BSP X 3/8" BSPF

033881
To suit Camec water tanks (refer codes 033422 and 033423.) Suits 033422, 033423 water tanks.



DRAIN CAP FOR CAMEC MK2 WATER

TANK
006087



TAP INLINE 13MM X 13MM

005401
1/2" low density poly quick action valve - barbed at both ends.



TEE FOR CAMEC MK2 WATER TANK

006088




PLUG 1/2" BSP

042652
To suit Camec Water Tanks.



CAMEC TANK BARB PLUG UNDRILLED

006080
To suit Camec water tanks.

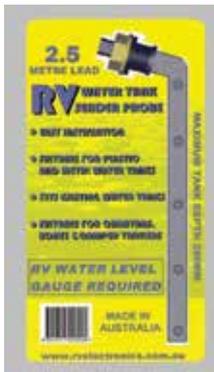

WATER TANK SENDER PROBE

- 040282 2.5M LEAD LENGTH
- 040283 5.0M LEAD LENGTH
- 040284 7.5M LEAD LENGTH

Water tank sender probe for use with RV Traveller LED Tank Gauge for "under chassis low profile tanks".



RV TRAVELLER LED TANK GAUGE

- 006118 1 TANK
- 006119 2 TANKS
- 006120 3 TANKS

Simple monitoring of fresh or grey water. Mains operated. One kit per tank required.

FEATURES:

- For under chassis low profile tanks, please use either code 040282, 2.5m probe, code 040283, 5m probe, or code 040284, 7.5m probe
- For deep tanks please use code 006116, tank sender probe kit



JRV FRESH WATER TANK MONITOR

- 006139 - JRV FRESH WATER MONITOR BLACK
- 006147 - JRV WATER TANK MONITOR BLACK. FRESH AND GREY WATER MONITOR
- 006144- JRV FRESH/GREY/BLACK WATER MONITOR BLACK

These systems allow the tank level monitoring of fresh water, grey water, black water.



SQUARE WATER TANK GAUGE

- 040276 - SINGLE WHITE GAUGE
- 040278 - DOUBLE WHITE GAUGE
- 040280 - TRIPLE WHITE GAUGE
- 040277 - SINGLE BLACK GAUGE
- 040279 - DOUBLE BLACK GAUGE
- 040281 - TRIPLE BLACK GAUGE

Accurately displays the water level in tanks.

FEATURES:

- The ability to customise the kits to suit your requirements with a range of single, double and triple tank gauges
- With one push on the test button you can check the water level of up to three tanks
- Easy installation - complete with hardware including battery
- Does not include sender probe



RV TRAVELLER LED GAUGE WATER AND WASTE

006121

Simple monitoring of fresh or grey water. Incorporates its own battery power supply and no connection to vehicle's power supply is required. One kit per tank required.

FEATURES:

- For water sender probes - under chassis low profile tank, please use code 040282, 2.5m probe, or code 040283, 5m probe or 040284, 7.5m probe
- For deep tanks please use code 006116, tank sender probe kit
- 2 gauges - 1 water / 1 waste



WATER TANK SENDER PROBE KIT

006116

To suit deeper tanks - 5 probes are mounted into the side of the tank (fresh or grey water only). Supplied with wiring kit, one junction box and 5m lead.

FEATURES:

- For under chassis low profile tanks, please use either code 040282, 2.5m probe, code 040283, 5m probe, or code 040284, 7.5m probe



LCD WATER TANK AND BATTERY GAUGES

- 043453 - SINGLE WATER TANK GAUGE
- 043454 - SINGLE WATER TANK, 1 BATTERY GAUGE

- 043455 - DOUBLE WATER TANK GAUGE

- 043456 - DOUBLE WATER TANK, 1 BATTERY GAUGE

- 043457 - TRIPLE WATER TANK GAUGE

These gauges have a coloured LCD analogue display with LED backlighting for crystal clear viewing. Only 50mA draw so they can be left on without flattening your on-board battery. There is a power on/off switch to turn the gauge off when the caravan is not in use.

FEATURES:

- Monitors one water tank, either metal or plastic
- Five levels are indicated on display
- Constant display of levels without needing to press a button
- On/Off switch when caravan is not being used

SPECIFICATIONS:

- Dimensions: 108mm x 108mm
- From 10 to 20mm thick
- 12V connection and tank plug entry at rear requires a cutout 50mm wide x 20mm high
- Colour of needle changes to red and flashes at the lowest (RES) level



LEAD 2.5M TO SUIT WATER MONITOR 006133

EXTENSION LEAD FOR 040282, 040283, 040284, WATER TANK SENDER PROBES

PUMPS



FLOJET 12V COMPACT PUMP 3/8B
005700

Compact, automatic shut off, 12V pump.

FEATURES:

- Self priming
- Dry running
- Soft, noise absorbing mounts
- Smooth operation without accumulator tank

SPECIFICATIONS:

- Dimensions: 157mm(l) x 58mm(h) x 89mm(w)
- Weight: 1.6kg
- Flow Rate: 3.8L/min
- Pressure: 35 psi
- Voltage: 12V
- Amps: 4A
- Fittings: 3/8" barb, adaptor to 1/2" barb



FLOJET PUMP AND FILTER
005702 12V
043251 24V

Super quiet, reliable demand pumps. Complete with filter.

FEATURES:

- Smooth operation without accumulator tank
- Permanent magnet, ball bearing motor
- Four chamber diaphragm design
- Corrosion resistant materials
- Includes bypass

SPECIFICATIONS:

- Dimensions: 99mm(h) x 160mm(W) x 206mm(L)
- Flow Rate: 12.5L/min
- Voltage: 12V
- Pressure Switch: 15psi (1.1 bar) cut in - 35psi (2.5 bar) cut out
- Amp Draw: 3.9A
- Fittings: 1/2" barb, 1/2" thread. Snap in fittings



FLOJET 12V TRIPLEX PUMP C-TICK QUAD FITTINGS
041723

The Flojet Triplex 12V Pump has 11 litres per minute water flow, 50 psi, automatic cut-off switch and is C-Tick approved. The pump is supplied with two Flojet quad port fittings that have been developed for the Australian RV market using John Guest and DM 12mm plumbing. The 12mm OD tube connects directly into each quad port fitting, eliminating the need to purchase adaptors. This not only saves cost but allows for quicker installation.

FEATURES:

- C-Tick approved
- Supplied with 2 x quad port fittings to suit 12mm OD tube
- Automatic cut off switch
- Note: Filter sold separately to pump - refer code 041775

SPECIFICATIONS:

- Dimensions: 200mm(l) x 130mm(h) x 120mm(w)
- Flow Rate: 11L/min
- Pressure: 50 psi
- Amps: 8 max
- Fittings: 2 x Quad to suit 12mm push-in pipe



FLOJET 12V RV PUMP
005727

Self priming 12V diaphragm pump with 1/2" fittings.

FEATURES:

- Self primes up to 2.4m vertical lift
- Four piston design delivers higher flow rates
- Quick connect plug-in ports for easy installation
- Pressure switch control to run the pump only as needed
- Includes an internal bypass to eliminate pulsating flow and switch chatter

SPECIFICATIONS:

- Dimensions: 157mm(l) x 58mm(h) x 89mm(w)
- Weight: 2.03kg
- Flow Rate: 12.1L/min up to 17L/min
- Pressure Switch: 22psi cut in - 35psi cut out
- Voltage: 12V
- Amps: 7 max
- Fittings: 2 x straight Quad to 1/2" MBSP, 1 x straight Quad to 1/2" barb, 1 x elbow Quad to 1/2" barb



SHURFLO AQUA KING PUMP
043430 12V

SHURflo Aqua King pump automatically senses when the tap has been switched on. Ideal for RV or marine applications. Reliable and quiet, it can run dry without damage.

FEATURES:

- Multi-fixture applications
- Self-priming and sealed switch
- Seamless shell e-coated motor
- Ignition and thermally protected

SPECIFICATIONS:

- Dimensions: 180mm(l) x 110mm(h) x 130mm(d)
- Flow Rate: 11.35L/min
- Pressure: 55psi
- Voltage: 12V
- Amps: 5 max
- Fittings: 1/2" MBSP



SHURFLO AQUA KING JUNIOR PUMP
005656

This 2 GPM pump guarantees quiet operation and smooth performance while providing the ultimate in durability and reliability. This 12V DC pump is designed and built for the harsh marine environment and for 1-2 fixture applications.

FEATURES:

- Self-priming and sealed switch
- Seamless shell e-coated motor
- Ignition and thermally protected

SPECIFICATIONS:

- Dimension: 184mm(l) x 127mm(h) x 118mm(w)
- Flow Rate: 7.6L/min (2.0/gpm)
- Voltage: 12V DC
- Amps: 4A
- Shut-Off Pressure: 30psi



SHURflo 4009 12V STANDARD PUMP ONLY

040860 - 12V STANDARD

043243 - 12V STANDARD RETAIL BOX

SHURflo's 4009 Series fresh water pump was created with a unique one piece diaphragm and internal bypass, assuring long life and top performance in all plumbing systems. The 4009 series pump is constructed for high flow demand, low noise and no rapid cycling. SHURflo's quality reputation has been built on the reliability and dependability of every pump they build. The 4009 series fresh water, automatic demand pump is quiet, thermally protected and can run dry without damage.

FEATURES:

- Internal bypass will prevent rapid cycling
- C-Tick approved
- 4 chamber diaphragm pump

SPECIFICATIONS:

- 12VDC permanent magnet
- Intermittent duty
- Shut Off: 45psi
- Dry Prime: 1.82m



SHURflo 12V COMPACT PUMP AND TAP 005699

Faucet offers smooth, easy flow with a washerless ceramic disc design. Versatile 360 degree spout rotation.



SHURflo 12V COMPACT PUMP

005698

043241 RETAIL BOX

This compact automatic demand fresh water pump offers durability and dependability making it ideal for low volume, intermittent duty applications. The 105 pump self-primers up to 2.0 vertical metres while delivering over 3.8Lpm. A 12V low power consumption motor, equipped with thermal protection and long life pressure switch rated to 30PSI, provides high pump performance and reliability.

FEATURES:

- Self primes up to 2.0m vertically while delivering up to 3.8L/min
- Perfect for low volume, intermittent duty applications
- Compact automatic demand pump
- Inlet and outlet: 10mm (3/8") barb



SHURflo 12V BLASTER PUMP

034384

RETAIL BOX

Perfect for tough wash down applications such as fish box, scaling and anchor chain cleaning.

FEATURES:

- Supplied with spray nozzle
- Delivers high lift, can run dry without damage and will not overheat with extended use
- Rugged and self-priming

SPECIFICATIONS:

- Flow Rate: 13.2L/min
- Pressure: 45psi



SHURflo 24 VOLT BLASTER WASH PUMP

005604

24V PUMP

Rugged and self-priming. Perfect for tough washdown applications such as fish box, scaling and anchor chain cleaning. Supplied with spray nozzle.

FEATURES:

- Ignition protected
- Switches are sealed against water damage
- Delivers high lift, can run dry without damage
- Won't overheat with extended use

SPECIFICATIONS:

- Dimension: 203mm(w) x 136mm(l) x 127mm(h)
- Flow Rate: 13.2 L/min
- Voltage: 24V DC -3A
- Pressure: 45psi



SHURflo 12V NAUTILUS PUMP

005588

Tough, rugged and compact. Designed to deliver 3.7L/min with minimal power consumption. Perfect for low volume, single fixture applications. Protected from thermal overload.

FEATURES:

- Tough, rugged and compact
- Requires in-line switch and 3A fuse
- 3/8" barbs



SHURflo 4009 24 VOLT STANDARD PUMP ONLY

041556

These portable water pumps are self-priming and employ three independent pumping chambers to pump water smoothly and quietly.

SPECIFICATIONS:

- Inlet and outlet: 1/2" male BSP threaded
- 30psi shut off



SHURflo 4048 12V STANDARD PUMP ONLY

041554

Pump guarantees quiet operation and smooth performance while providing the ultimate in durability and reliability.

FEATURES:

- Thermally protected
- Smooth flow

SPECIFICATIONS:

- 15L/min
- Voltage: 12V
- Pressure: 55psi

SHURflo SPARE PARTS

070035 - UPPER HOUSING TO SUIT

BLASTER PRO PUMP 94-706-01

043924 - PRESSURE SWITCH FITS 4048 PUMP

005641 - MICRO SWITCH SUITS 2088 / 200 / 2095

005666 - PUMP REPAIR KIT

005674 - 2088 DIAPHRAM DRIVE KIT

005677 - UPPER HOUSING TO SUIT 2088

042112 - 4009 SWITCH 45PSI

042114 - 4009 UPPER ASSEMBLY 45

042115 - 4009 VALVE ASSEMBLY

042116 - 4009 DRIVE ASSEMBLY

042117 - 4009 CHECK VALVE



SHURFLO SWIVEL UNIONS

005407 - 1/2B X 1/2F TIGHTEN BY HAND ONLY

005408 - 1/2B X 1/2F TIGHTEN BY HAND

005410 - 3/4B X 1/2F TIGHTEN BY HAND ONLY

- Note: these will not give a water tight seal on all BSP threads as they also rely on the internal section making contact with the internal flared SHURflo/Flojet pump thread



SHURFLO SWIVEL ELBOW

005404 - 1/2" B X 1/2" BSP FEMALE

005406 - 3/4" B X 1/2" BSP FEMALE

Nut and tail to suit 12mm hose. Tighten by hand only.

- Please note, these will not give a water tight seal on all BSP threads as they also rely on the internal section making contact with the internal flared SHURflo/Flojet pump thread



SHURFLO CLASSIC TWIST ON FILTER

005687 - EXTREME TWIST ON FILTER

005672 - CLASSIC TWIST ON FILTER

034391 - CLASSIC TWIST ON FILTER

RETAIL PACK

Fits directly to the inlet of all Classic and Aqua King pumps.

FEATURES:

- The transparent design allows for easy visual check while the bowl allows easy cleaning

SPECIFICATIONS:

- 1/2" NPSM Inlet



SHURFLO EXTREME FITTING KIT 1/2" STRAIGHT THREAD

005519



SHURFLO PRESSURE ACCUMULATOR

034387

Pre-pressurised to 25psi, cycling pulsation is reduced and pressure spikes up to 125psi increasing the life of the pump and saving battery power.

SPECIFICATIONS:

- 1/2" NPTM
- Pressure: 30psi



SHURFLO 12/24 VOLT FLOAT SWITCH STANDARD CAGED

036789

SHURflo Float Switch provides ultimate reliability to boats for water evacuation in conjunction with bilge pumps.

FEATURES:

- Remote or direct mounting
- 3" tinned wire assembly
- Non-mercury
- Ignition protected



SHURFLO BILGE PUMP 500

036770

This pump is built for the harsh marine environment to withstand the toughest conditions.

FEATURES:

- Submersible with 3" tinned wire assembly
- Anti-airlock
- Ignition protected

SPECIFICATIONS:

- ABS housing with nylon impeller





WHALE SUPERSUB 921 12V PUMP 005751

Suitable for dual purpose manual/electric systems.

FEATURES:

- Self venting design eliminates air locking
- Designed to be dropped into a water tank
- Does not require priming
- Simple, compact and low cost
- Inexpensive way to update from a manual to an electric system

SPECIFICATIONS:

- Dimensions: 160mm(l) x 50mm(h) x 50mm(d)
- Weight: 200g
- Flow Rate: 15L/min
- Pumps fresh, saltwater and diesel
- Low power consumption



WHALE SUPERSUB 12V PUMP 035605

Suitable for dual purpose manual/electric systems.

FEATURES:

- Does not require priming
- Simple, compact and low cost
- Self venting design eliminates air locking
- Designed to be dropped into a water tank
- Inexpensive way to update from a manual to an electric system

SPECIFICATIONS:

- Dimensions: 116mm(l) x 50mm(h) x 50mm(d)
- Weight: 150g
- Output: 12L/min
- Pumps fresh, saltwater and diesel
- Low power consumption



WHALE 12V IN LINE PUMP 005753

In-line, 12V centrifugal pump, light enough to be suspended in the hose line. Sealed against casual water.

FEATURES:

- Simple, compact and low cost
- Boosts pressure in manual or electric pump systems
- Ideal for up to two mixer outlets
- Lightweight, fits unsupported into pipework
- Fits neatly below water tank

SPECIFICATIONS:

- Dimensions: 135mm(l) x 38mm(h) x 38mm(d)
- Weight: 150g
- Output: 10L/min
- Hose tails accept 3/8" or 1/2" ID hose
- Low current draw



WHALE 12V PORTABLE PUMP KIT 043259

Handy 12V submersible pump with accessories.

FEATURES:

- Simply drop the pump into your water supply and then plug it in
- Great for filling your caravan fresh water tank from a jerry can when camping
- Great for washing down bikes, surf boards etc
- Robust pump suitable for cold and warm water, diesel, light oils and water-based fluids including most water based pesticides
- Pumps up to 15 litres per minute
- Maximum continuous usage should not exceed 15 minutes

KIT INCLUDES:

- Whale supersub pump
- 3.75m clear hose and nozzle
- 3.75m lead for 12V connections to a cigarette lighter
- Battery terminal adaptor



WHALE TIP TOE SERVICE KIT 005581

Service kit for Whale Tip-Toe foot pump



WHALE PRESSURE SWITCH 005754

When fitted inline provides a convenient way to create a pressure system with an electric pump without its own switch.

SPECIFICATIONS:

- Current Rating: 10A 12/24V
- Cut Out Pressure: Within range 5-25psi



WHALE ONE-WAY IN-LINE VALVE 005785

When fitted in line on the suction side of a pump, Whale non-return valves will ensure maintenance of prime, particularly if pump valves are weak.

SPECIFICATIONS:

- Suit 12.5mm ID hose



FLOJET IN-LINE FILTER 1/2" MALE THREAD BOTH ENDS
005724



FLOJET IN-LINE FILTER 1/2" BARB
005712



FLOJET FILTER 1/2" BARB FILTER QUAD PORT FITTED TO PUMP
005706

SPECIFICATIONS:

- Filter (strainer) inlet, 12mm barb to Quad with elbow
- Plug in quad port 90° strainer allows for easy installation and compatibility



FLOJET IN-LINE FILTER
041775

The Flojet 40 mesh filter has a quick connect quad port fitting to suit Flojet pumps and the filter mesh is easily removed for cleaning.



FLOJET STRAINER 4405 SERIES
043252

For use with the Flojet Quad II Series Pump.



FLOJET STRAIGHT UNION 1/2" BARB
005705



FLOJET ELBOW 1/2" BARB
005704

Quick connect quad port fitting incorporating a 90° elbow with 1/2" barb.



FLOJET ELBOW 1/2" THREADED
005707



FLOJET STRAIGHT 1/2" THREADED
005711



FLOJET 1/2 FITTING STRAIGHT PAIR OF QUAD FITTINGS
039903



FLOJET 3/4" BARB STRAIGHT
005709



FLOJET SIDE CLIPS
005710



FLOJET PRESSURE SWITCH ASSEMBLY - 35PSI
005716



FLOJET PRESSURE SWITCH ASSEMBLY - 40PSI
005719



FIAMMA ACCUMULATOR TANK A20
035603

May be used with most pump systems and may be mounted in any position.

SPECIFICATIONS:

- Dimensions: 240mm(l) x 100mm(h) x 100mm(d)



FLOJET REPAIR KIT
005714



FLOJET DIAPHRAGM KIT
005715



EQUAL TEE CONNECTOR - WATERMARKED
044117
12mm



STEM ELBOW - WATERMARKED
044118
12mm



STRAIGHT TAP CONNECTOR - WATERMARKED
044119
12mm x 1/2" BSP



ELBOW TAP CONNECTOR - WATERMARKED
044120
12mm x 1/2" BSP



STEM TEE - WATERMARKED
044121
12mm



END STOP - WATERMARKED
044122
12mm



BRASS STRAIGHT ADAPTOR - WATERMARKED
044123
12mm x 1/2" BSPT



FEMALE ADAPTOR - WATERMARKED
044124
12mm x 1/2" BSP



INSERT SUITE BPEX - WATERMARKED
044125
12MM



COLLET CLIP - WATERMARKED
044127 BLUE
044128 RED
12mm



ELBOW CONNECTOR - WATERMARKED
044129
12mm



STRAIGHT CONNECTOR - WATERMARKED
044130
12mm

PLUMBING FITTINGS



BPEX PIPE 50M - WATERMARKED

044126

12mm



JOHN GUEST TUBE 12MM LLDPE

005252 - 100M ROLL BLACK

005254 - 100M ROLL RED

005256 - 100M ROLL BLUE

Linear Low Density Polyethylene for cold and intermittent hot water applications, water purification, water conditioners, ice makers and misting systems.

FEATURES:

- Wide range of temperature and pressure suitability, broad chemical compatibility and made from non-contaminating materials
- Excellent resistance to environmental stress cracking as measured by ASTM D-1693 (10% IGEPAL)

SPECIFICATIONS:

- Sold as 100m roll
- FDA compliant materials



ADAPTOR STEM

Plastic stem adaptor to suit 12mm connectors.

005439

1/2" M/BSP X 12MM

(JG)



CAMEC 12MM OD LLDPE TUBING

043458

100M ROLL BLUE

043459

100M ROLL RED

043460

100M ROLL

BLACK

043461

10M ROLL BLUE

043462

10M ROLL RED

043463

10M ROLL

BLACK

FEATURES:

- Linear Low Density Polyethylene tubing made from FDA approved materials
- Perfect for caravan plumbing with 12mm push-fit type connections
- Available in 100m and 10m rolls

SPECIFICATIONS:

- Max Working Pressure: 10 Bar / 145psi @ 20°C. 6 Bar / 90 PSI @ 65°C



MALE HOSETAIL

044373

40mm BARB X 1 1/2" MBSP



BARREL UNION NIPPLE

044374

1 1/2" MBSP NIPPLE



ADAPTOR 12MM

005437 - 12MM X 3/8" M/BSP (JG)

005435 - 12MM X 1/2" M/BSP (JG)

042581 - 12MM X 1/2" M/BSP AND O RING (JG)

005464 - 12MM X 1/2" M/BSP (DM)



BARREL UNION

044375

1 1/2" FMBSP UNION



TUBE CUTTER - PLASTIC TUBING

Plastic tube cutter for plastic tubing.

042584



SWIVEL ELBOW BRASS END (JG)

038790



WATER 1/2" BARB - HOSE (JG)

038657



ELBOW FEMALE 12MM
005430 ELBOW (JG)



EQUAL DIVIDER 12MM (JG)
038944



ELBOW MALE BSP 12MM
005434 3/8" MBSP (JG)
005441 1/2" MBSP (JG)



ELBOW MALE/FEMALE 12MM
005440 ELBOW 12MM X
12MM STEM (JG)



REDUCER 15MM
005438 REDUCER 15MM X
12MM (JG)



REDUCING CONNECTOR 12 - 10MM
005447
Plastic reducer adaptor from 12mm to 10mm.



TEE CONNECTOR 12MM
005429



ADAPTOR FEMALE BSP
005433 - 12MM X 3/8" F/BSP (JG)
005436 - 12MM X 1/2" F/BSP (JG)



STRAIGHT CONNECTOR
005431 12MM X 12MM
(JG)



CONNECTOR BARB
005432 15MM X 1/2" BARB
(JG)



TUBE SUPPORT INSERT - 12MM
005443



GARDENA 1 1/16" MALE USA ADAPTOR
005398
Snap on hose fitting to suit the SHURflo In-line
Water Entry.



HOSE COUPLER 12MM 2 WAY
042604



ADAPTOR 12MM
042059 12MM BULKHEAD
(JG)



BRASS ADAPTOR 12MM MALE BSP
005442 12MM X 1/2" M/BSP
(JG)

PLUMBING FITTINGS



HOSE CLAMP WORMDRIVE ALL ZINC FINISH

005330	10-16MM
005331	12-22MM
005332	20-32MM
005333	25-40MM

These general purpose hose clamps are ideal for hose sealing and use in many different applications with a high mechanical load.

FEATURES:

- Improved asymmetric housing
- Screw support: Ease of assembly due to the safe guidance of the emerging band end
- Material and clamping range stamped on the band
- Asymmetric extension - prevents the housing from tilting over when the clamp is tightened

SPECIFICATIONS:

- Screw and housing: Mild steel zinc plated and clear chromate



PIPE RETAINING CLIP 12MM WIDE

042638	15MM
042639	27MM
042640	35MM



DIRECTOR PLASTIC

005354	- 10MM BARB X 1/2" MBSP
005355	- 13MM BARB X 1/4" MBSP
042641	- 13MM BARB X 1/2" MBSP
042651	- 13MM BARB X 3/4" MBSP
042647	- 25MM BARB X 3/4" MBSP
042650	- 25MM BARB X 1" MBSP



JOINER BARBED TAILS

10MM	005371
13MM	042693
25MM	042645



ELBOW BARBED PLASTIC

13MM	042695
25MM	042644



TEE THREADED

005383	10MM BARBED
042694	13MM BARBED
042649	25MM BARBED



REDUCER PLASTIC BARBED

005378	10MM X 13MM
005382	25MM X 32MM
042657	25MM X 19MM



ELBOW THREADED PLASTIC

042654	- 13MM BARB X 1/2" INLET MBSP
005368	- 25MM BARB X 3/4" MBSP



LOCKING CLIP 12MM

005444

Optional locking clip to fit 12mm push-on fittings.

FEATURES:

- Prevents leaks or release when pipe is forced to a side
- Can be removed if the fitting is to be removed
- Essential if pipe does not meet fitting at correct angle



COLLET COVER 12MM - BLACK (JG)

005445



SHURFLO IN-LINE CHECK VALVE 1/2INB

005789

Allows flow in one direction only to safeguard against back surge up to 100psi.

SPECIFICATIONS:

- 1/2" barb on both ends



JOINER 13MM HOSE X 3/4" FEMALE NPT

005412



JOINER 13MM HOSE X 3/4" MALE NPT

005411

FEATURES:

- Unbreakable and reusable nylon
- RV hose repair made easy



ONE WAY VALVE

005798

A very useful accessory which can be fitted into the pump suction line to help ensure maintenance of electric pumps.



HOSE CONNECTORS

042601 - CONNECTOR 12MM X 1/2" HOSE
042602 - STOP 12MM X 1/2" HOSE



CONNECTOR AND HOSE 12MM SNAP-IN PLASTIC 12MM HOSE FEMALE

005415



TAP ADAPTOR UNIVERSAL 3/4" BSP

042603



NUT AND TAIL PLASTIC

042658 - 3/4" BSP X 13MM BARB
042659 - 1" BSP X 13MM BARB
042646 - 1" BSP X 25MM BARB



VALVE PLASTIC SHUT OFF

042643 13MM
042655 25MM

Twist action - barbed both ends.



TEE 1/2"

042653

13mm barb x 13mm barb x 1/2" inlet.



BRASS USA-BSP CONVERTER

034571

Brass conversion for USA threaded water inlet to BSP. The commercial plastic elbow brings the hose neatly down next to the vehicle.

FEATURES:

- Includes plastic elbow



BRASS HOSE ADAPTOR CLICK ON 1 1/16" USA THREAD

005399

FEATURES:

- Click-on 1 1/16" American thread



CAMLOCK WITH 25MM BARB TYPE C

034817

FEMALE BARB

034818

Female camlock with 25mm barb used to connect two hoses with 25mm inner diameter when used in conjunction with equivalent female camlock. Often used to join 25mm waste hose.

FEATURES:

- Supplied with R clips x 2 to lock in camlock
- Often used to join 25mm waste hose
- Polypropylene



BRASS UNIVERSAL HOSE ADAPTOR

042691



BRASS EZ HOSE CONNECTOR

042692



TEMPERING VALVE (JG)

042586

Designed to accurately regulate the temperature of water for activities such as showering, bathing and hand washing and reduces the risk of scalding. Ideal for caravan and RV plumbing.

FEATURES:

- Lightweight and easy to install
- Preset to 50°C
- AS/NZ 4020 (water contract approval)



IN-LINE CHECK VALVE 12MM

Push-on fitting to allow flow in one direction only.

FEATURES:

- Prevents water returning down a pipe

12MM (JG) 042582



FILTER IN-LINE PLASTIC 13MM

To suit 13mm hose

042648 - 13MM SHORT

042696 - 13MM LONG



SHUT OFF VALVE IN-LINE STRAIGHT

Plastic straight shut off inline valve

042583

12MM (JG)

HOT WATER HEATERS

**CAMEC DIGITAL INSTANTANEOUS GAS WATER HEATER**

042793	WHITE HWS
043993	BLACK HWS
043994	WHITE DOOR
043995	BLACK DOOR

Camec's New European designed Instantaneous Water Heater system is an economical solution for RV's to supply constant hot water. Unlike 240V systems that draw extensive current, clever design of this system means it can operate for many hours at maximum heating capacity from just one 9kg gas bottle! The digital controller gives you flexibility to set your desired water temperature plus peace of mind knowing the water temperature can be controlled so it will not be too hot for children.

One of the key benefits of an RV instantaneous water heater is that gas is only used when water flows (the water heater is activated by the initial flow of water through the system). In other storage tank systems, energy is required on a continual basis to keep the water stored at the desired temperature and with an instantaneous system, you are able to use all of the available water in your RV's storage tank(s).

FEATURES:

- Designed specifically for RV use
- Australian Gas and Watermark Approvals
- Operates from 12V DC & Gas
- Continuous hot water flow
- Remote digital temperature controller with error code display and on/off switch
- Up to 60% less gas consumption than regular tank models
- No anode to replace
- Door lock compatible with Camec One Key System
- Easy to install and suits most existing water heater cut outs
- Patented rain protection exhaust
- Low power and gas usage

SPECIFICATIONS:

- Super efficient 36,500BTU heating power
- Weight 12.1kg
- Installation cut-out dimensions: 300mm (w) x 300mm (h) x 380mm (d)
- Water temperature selectable from 35-60°C
- Minimum starting water flow: 2.5l/min



- Shut down water flow: 1.3 l/min
- Temperature rise at 3.3/min water flow: 37.7°C
- Power requirement: 10.5-15V DC; maximum current 0.44A
- Maximum Consumption (g/h): 765
- Maximum Consumption (MJ/h): 38.5
- Efficiency: >90%

CAMEC HOT WATER SYSTEM SPARE PARTS

044707 CAMEC IWH BLACK DOOR - NO LOCK
 044708 CAMEC IWH WHITE DOOR - NO LOCK
 044746 CAMEC IWH HEATER EXCHANGER
 044747 CAMEC IWH BURNER
 044748 CAMEC IWH SILICON TUBE 300MM
 044749 CAMEC IWH WATER FLOW SENSOR
 044750 CAMEC IWH WATER INLET
 044751 CAMEC IWH WATER DRAIN VALVE
 044752 CAMEC IWH PRESS RELIEF VALVE
 044753 CAMEC IWH THERMOSTAT
 044754 CAMEC IWH AIR PRESSURE SWITCH

044755 CAMEC IWH GAS VALVE
 044756 CAMEC IWH IGNITOR 12V
 044757 CAMEC IWH DIGITAL CONTROLLER
 044758 CAMEC IWH ELECTRONIC CONTROL UNIT
 044759 CAMEC IWH MAIN WIRE HARNESS
 044760 CAMEC IWH 12V POWER LEAD
 044761 CAMEC IWH DISPLAY CABLE SHORT
 044762 CAMEC IWH DISPLAY CABLE 5M
 044763 CAMEC IWH COLD WATER SENSOR
 044764 CAMEC IWH HOT WATER SENSOR
 044765 CAMEC IWH EXHAUST PIPE
 044894 CAMEC IWH VENTILATOR



SUBURBAN 23 LITRE GAS/ELECTRIC HOT WATER HEATER - WATERMARKED 044279

The Suburban HWS range all have porcelain lined, high tensile steel tanks, which are pressure tested twice assuring tank integrity and life.

There are a number of gas and gas-electric models available to suit most hot water requirements while travelling. The automatic models feature direct spark ignition with a remote switch for on/off control from inside the RV. Gas consumption is also kept to a minimum, making Suburban an economical choice.

This Suburban operates on universal gas & 240V and has a 12V ignitor.

SPECIFICATIONS

- Capacity: 22.6Lt
- Max working pressure: 850Kpa
- Hourly gas consumption: 9.60mj/hour
- Test point pressure: 2.63Kpa
- Jet orifice size: 0.89mm
- Type of heating medium: Universal Gas/ 240Volt
- Recovery: 40Lt/hr 450C rise
- Auto gas ignitor: 12Volt DC
- Element rating: 1440 Watts – 6 Amp
- Dimensions: 320mm(w) x 500mm(d) x 320mm(h)
- Includes service door



MAGNESIUM ANODE ROD

035975

044044

RETAIL PACKAGING

Slightly acidic water is fine to drink and wash with, but it can degenerate your water heater over time. Some water heaters have an in-built anode rod of soft metal that will break down instead of the other components of the water heater. Anodes should be replaced when they have degraded more than 75%, usually yearly, but this is dependent on the quality of water used.

FEATURES:

- Magnesium AZ31
- To suit Suburban hot water systems

SPECIFICATIONS:

- Size: 17mm x 235mm
- Thread: 3/4" NPT



ATWOOD WATER HEATER 22.7L GAS AND 240V

042889

WHITE DOOR

042890

BLACK DOOR

Gas or 240V hot water system.

FEATURES

- Dual operation, gas or 240v can be used individually or simultaneously.
- Super efficient heater tube design effectively heats more water using less gas
- Greater recovery rate means more hot water, more often
- Non-corrosive aluminium tank that doesn't require an anode
- Lightweight nearly half the weight of other units in its class
- Electronic ignition simple flick of a switch from inside the RV turns the unit on or off
- 240v switch also easily accessible from inside the RV on the same switch plate
- Adjustable combustion shutter allows for oxygen levels to be adjusted for optimal performance
- Incalloy 240v heater element that wont burn out when operating in a dry tank
- Easy to install and service, 98% of servicing done through the external door

SPECIFICATIONS

- Capacity: 22.7L
- Gas consumption: 9.28 MJ/hour
- Recovery: 68 L/H
- Electric rating (240v) 1400 watts
- Dimensions: 318mm(h) x 406mm(w) x 457mm(d)
- Weight: 8.6Kg

ATWOOD HOT WATER SYSTEM SPARE PARTS

003576 - CIRCUIT BOARD 91367

003577- SPARK PROBE ASSEMBLY 93868

003579 - IGNITION SWITCH 91959

003580 - THERMAL CUT OFF US-93866

003581 - GAS SOLENOID VALVE US-93846

003582 - PRESSURE RELIEF VALVE 91604

044088 - HWS DOOR POLAR WHITE NEW MODEL 91393

003592 - HWS DOOR HINGE PINS WITH WASHERS 91858

043180 - HEATING ELEMENT & GASKET

043652 - VALVE GAS CONTROL FOR 042889

043655 - VALVE RELIEF FOR 42899



ADJUSTABLE PRESSURE REDUCING VALVE

039245

SPECIFICATIONS:

- 1/2" Female BSP
- 110-550KPA



WATER HEAT TEMPER VALVE 1/2" MALE BSP BLUE CAP INSULATED

039244

This valve is suitable for domestic and commercial installation on water heater systems.

FEATURES:

- Recommended for all hot water services on the outlet side
- Blue cap

SPECIFICATIONS:


- Dimensions: 150mm(l) x 150mm(h) x 70mm(d)



1 1/16" SOCKET TO REPLACE SUBURBAN ANODES

043383

FILTRATION

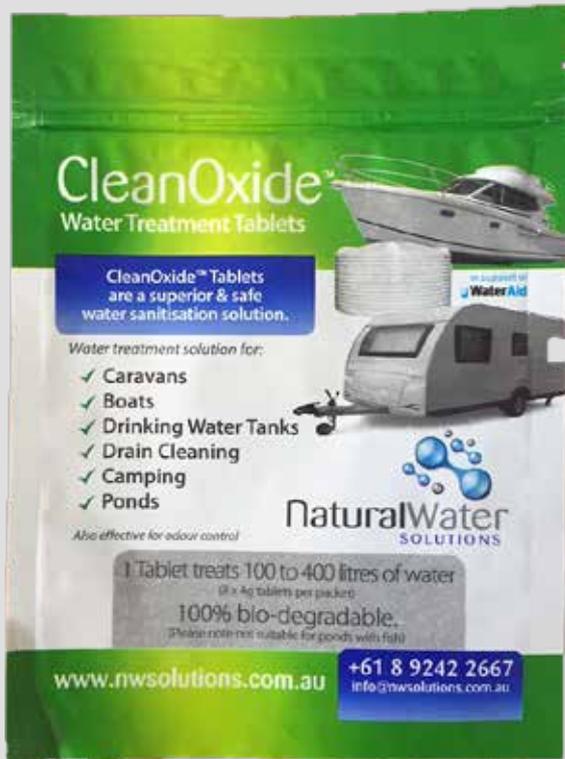

CLEANOXIDE DRINKING WATER TREATMENT TABLETS

043283

FEATURES:

- Controls bacteria, fungi, viruses, biofilm and algae
- Neutralises unpleasant taste and odours from the tank
- Effective over a wide pH range (4 to 10)
- Biodegrades in sunlight, so no harmful effects on the environment if flushing your tank
- Active ingredient was approved in Australia for the treatment of drinking water in 2005
- Each tablet treats 100 to 400 litres of water
- Zip-lock pouch with full instructions on the back



B.E.S.T. INLINE WATER FILTER 1 MICRON

038332 - WITH FITTINGS
 043282 - 1/2" FBSP NO FITTINGS
 044190- NYLON BUSH - FILTER TO JG HOSE

The hose range is a DIY installation - it connects to your drinking water/filling hose in less than a minute.

This inline is dual purpose - it can be used on your hose to fill your tanks and also when you are connected directly to mains water.

FEATURES:

- Reversible - if the flow reduces, simply reverse the unit, hook it back up and flush the dirt away
- Compact - stores away with your hose
- Sealed - no cartridges



SHURFLO FILTRATION KIT FOR RV AND MARINE

036794 KIT
 036795 REPLACEMENT FILTER CARTRIDGE

Designed for both RV and marine applications.

FEATURES:

- Supplied complete with all parts and fittings including carbon block disposable filter
- Reduces unpleasant tastes and odours
- Provides fresh, clean drinking water



AQUATAB WATER TABLETS

000263

Effervescent water purification tablets. When dissolved in one litre of water, renders water suitable for drinking after just thirty minutes.

FEATURES:

- Fast acting and fast dissolving

SPECIFICATIONS:

- Pack of 50
- 1 tablet/1 litre water



WHALE AQUA SOURCE WATER FILTER

026528

An inline water filter to be fitted in the cold water pipe.

FEATURES:

- Very efficient
- When fitted, filter will remove foreign bodies and dirt particles
- Disposable



B.E.S.T. INLINE MOUNTING CLIPS

038333

Mounting clips for B.E.S.T. Inline Water Filter (refer code 038332).

SPECIFICATIONS:

- Pack of 2



CAMEC STAINLESS STEEL SINK 890MM X 480MM
042973

Includes waste, plug and mounting clips.

SPECIFICATIONS:

- Dimensions: 890mm(w) x 480mm(d) x 170mm(h)
- Dimensions of main sink: 315mm(w) x 380mm(d)
- Dimensions of secondary sink: 155mm(w) x 300mm(d)
- 90mm waste outlets



CAMEC STAINLESS STEEL ROUND BASIN 450MM
042974

Includes waste, plug and mounting clips.

SPECIFICATIONS:

- Dimensions: 450mm(diam.) x 180mm(d)



CAMEC STAINLESS STEEL SINK 780MM X 480MM
042976

Includes waste, plug and mounting clips.

SPECIFICATIONS:

- Dimensions: 780mm(w) x 480mm(d) x 170mm(h)
- Dimensions of main sink: 330mm(w) x 380mm(d)
- 90mm waste outlet



CAMEC STAINLESS STEEL SINK WITH DRAINER
038169

Top quality stainless steel basin and drainer.

FEATURES:

- Foam tape and 10 brackets included
- Does not include plug or waste

SPECIFICATIONS:

- Dimensions: 760mm(w) x 155mm(h) x 360mm(d)
- 45mm waste outlet



CAMEC STAINLESS STEEL SINK WITH DRAINER
006046

Top quality stainless steel basin and drainer.

FEATURES:

- Foam tape and 8 brackets included
- Does not include plug or waste

SPECIFICATIONS:

- Dimensions: 780mm(w) x 170mm(h) x 480mm(d)
- 45mm waste outlet



CAMEC STAINLESS STEEL ROUND BASIN AND DRAINER
042975

Includes waste, plug and mounting clips.

SPECIFICATIONS:

- Dimensions: 850mm(w) x 450mm (d)x 170mm
- Dimensions of sink: 357mm (diam.)
- 90mm waste outlet



CAMEC STAINLESS STEEL BASIN

038170 - 315MM X 265MM X 145MM(D)
038171 - 327MM X 278MM X 150MM(D)
038172 - 352MM X 282MM X 155MM(D)
FULL FLANGE

Top quality stainless steel basins available in a number of sizes.

FEATURES:

- Can be top or under mounted



SMEV SINK STAINLESS STEEL AND DRAINER

006032 - 590MM X 370MM X 125MM DEEP
006033 - 650MM X 380MM X 135MM DEEP

Compact stainless steel top fixing sink and drainer.

FEATURES:

- Includes plug and straight waste
- Includes perimeter seal and fitting clips (only with 006033)



STAINLESS STEEL BASIN

006051 - 282 X 225MM
006053 - 306MM X 306MM X 120MM
006050 - ROUND BASIN 280MM DIAM X 112MM(D)
044405 - 370MM X 320MM X 150MM

Top quality stainless steel basin available in a number of sizes.

FEATURES:

- The full extent of stainless steel is an extra 15mm on all sides
- Does not include plug and waste (25mm) - refer to code 006064, plug, code 006072, straight waste or code 006073 for 90° angle waste

SINKS AND BASINS



SMEV BASIN STAINLESS STEEL

- 006059 380MM X 280MM
- 006057 370MM X 370MM
- 006058 380MM X 380MM

Attractive compact stainless steel top fixing sink.

FEATURES:

- Includes plug and straight waste



SMEV BASIN/LID/MIXER TAP

006063

FEATURES:

- Stainless steel bowl
- Glass lid
- Hot and cold tap (refer code 005983)

SPECIFICATIONS:

- Dimensions: 420mm(l) x 145mm(h) x 440mm(d)
- Tap fittings are 3/8" Male BSP



BASIN STAINLESS STEEL

006052

Attractive compact stainless steel sink.

SPECIFICATIONS:

- Dimensions: 335mm x 254mm (14" x 10")



ACRYLIC CORNER BASIN

043617

Acrylic corner basin/sink.

SPECIFICATIONS:

- Dimensions: 279mm(l) x 120mm(h) x 279mm(d)
- Inside Sink Dimensions: 280mm(l) x 210mm(w)
- Plug not included
- Waste Hole: 42mm (diam)
- Use with pop-up waste 043373
- White



ACRYLIC NARROW RECTANGLE BASIN

043618

Acrylic, light and sturdy rectangular basin/sink.

FEATURES:

- Sits into a cutout in a bench top or can be attached to wall
- Includes soap drainer
- Space for single tap on either side

SPECIFICATIONS:

- Dimensions: 508mm(w) x 130mm(h) x 178mm(d)
- Plug not included
- Waste Hole: 42mm (diam)
- Use with pop-up waste 043373
- White



ACRYLIC RECTANGLE BASIN/SINK

043616

Note: The top surface that normally sits above the bench top on these basins is not as smooth as the inner surface of sink/basin - it is not a fault but a function of the manufacturing process.

SPECIFICATIONS:

- White
- Use with pop-up waste 043373
- Plug not included
- Dimensions: 330mm(l) x 120mm(h) x 285mm(d)
- Inside Sink Dimensions: 300mm(l) x 120mm(h) x 250mm(d)



PLASTIC SINK AND DRAINER

006042

Acrylic sink and drainer. Does not include taps or waste.

SPECIFICATIONS:

- Dimensions: 706mm(l) x 318mm(w) x 115mm(d)
- Inside Sink Dimensions: 350mm(l) x 285mm(w) x 115mm(d)
- Acrylic is 4.5mm thick giving a stable sink and drainer when fully recessed and mounted just with the edging
- White



PLASTIC OVAL BASIN

043926

- Dimensions: 380mm(w) x 305mm(d) x 150mm(h)
- Use with pop-up waste 043373
- White



MINI CORNER BASIN WITH FULL SKIRT

044832 - BASIN

042871 - WASTE KIT FOR 45MM SINK HOLE 90°

FEATURES:

- Useful in shower/toilet combination rooms for space-saving corner design. Neatly hides plumbing behind the skirt
- Does not include mounting screws or a waste outlet



POP-UP WASTE KIT
043373

- Lightweight construction making it perfect for plastic / fibreglass and ceramic sinks
- Stylish with only the chrome top visible
- Easy operation
- Suits basin holes from 40 – 45mm
- Simple installation with a screw collet under the sink
- Long stem can be cut to required length



PLUG AND WASTE KIT - 90°
006068

To suit SMEV sinks/basins. Includes 25mm P-Trap.



PLUG ONLY FOR SINK/BASIN
006067

To suit SMEV sinks/basins only.

SPECIFICATIONS:

- Dimensions: top taper 36.75mm bottom taper 35.26mm



SMEV PLUG AND WASTE KIT - STRAIGHT 25MM
006065

To suit SMEV sinks/basins.



WASTE KIT FOR 45MM SINK HOLE
042871

043184 - REPLACEMENT PLUG
90° outlet with plug.



RUBBER SINK PLUGS

006064 - 25MM RED
035578 - 32MM RED
006075 - 25MM (1 1/8") GREY

To suit sinks/basins.



PLASTIC WASTE 25MM OUTLET STANDARD
006072

Straight waste suitable for 25mm hose.

FEATURES:

- Plug sold separately
- Straight waste



PLASTIC 90° WASTE OUTLET 25MM
006073



SINK RUBBER SEAL 520
006035

Rubber edge seal 520 suits SMEV sink/basins.

SPECIFICATIONS:

- Sold per metre



SINK RUBBER SEAL 521
006036

Rubber edge seal 521 suits SMEV sink/basins.

SPECIFICATIONS:

- Sold per metre



CAMEC HAND PUMP

043156

Robust chrome plated brass hand pump for drinking water.

FEATURES:

- Self priming, dual action
- Easy installation

SPECIFICATIONS:

- Height Above Bench: 65mm
- Suits 1/2" tubing
- Chrome plated



BREHA HAND PUMP

005542 - BLACK

005543 - WHITE

005554 - TOP PLUNGER SEAL

005555 - BOTTOM PLUNGER SEAL (BS101) BLACK

035599 - WASHER KIT (BS100 AND BS101)

Self priming and simple to install.

SPECIFICATIONS:

- Fits a sink with a 32mm mounting hole



BREHA HAND PUMP SHORT STEM

005546

Self priming and simple to install.

SPECIFICATIONS:

- Fits a sink with a 32mm mounting hole
- White



LOW BOY 3 WAY PUMP FAUCET

005578

FAUCET

005579

REPAIR KIT

Combination hand pump, mains pressure and 12V electric pump.

FEATURES:

- Low silhouette suitable for fold down campers
- Mains pressure and 12V electric pump



HAND PUMP FYNspray

005549

HAND PUMP

WS63

Black moulded nylon body with chrome plated brass handle and swiveling spout. Suitable for fresh or salt water.

SPECIFICATIONS:

- Output: 1L/per 15 strokes



CAMEC BASIN 110MM FIXED SPOUT

041716

042792 - 40MM REPLACEMENT

CARTRIDGE

Basin mixer with 110mm fixed spout with a 40mm cartridge.

FEATURES:

- WELS rated complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 40mm cartridge



CAMEC 3 WAY SINK MIXER 35MM CARTRIDGE WELS RATED

041677

042791 - 35MM REPLACEMENT

CARTRIDGE

3 way sink mixer incorporates two taps in one - a sink mixer and a filtration faucet. This dual stream has two outlets in the spout and eliminates the need to mount a second faucet for filtered water. Please Note: The tap does not filter water, a separate filtration kit is required.

FEATURES:

- WELS rated, complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads



CAMEC HIGH BASIN MIXER

041676

042791 - 35MM REPLACEMENT

CARTRIDGE

FEATURES:

- WELS rated, complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 35mm cartridge



CAMEC BASIN MIXER 150MM SPOUT
041674
042792- 40MM REPLACEMENT
CARTRIDGE

Basin mixer with 150mm spout with a 40mm cartridge.

FEATURES:

- WELS rated complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 40mm cartridge



CAMEC SINK MIXER 220MM SPOUT
041675
042792- 40MM REPLACEMENT
CARTRIDGE

Sink mixer with 220mm spout with a 40mm cartridge.

FEATURES:

- WELS rated complies Australian/NZ standard AS/NZS 6400
- Stainless steel braided hoses 350mm length and 1/2" female BSP threads
- 40mm cartridge



SINGLE COLD TAP
005995

Low profile fixed pillar tap.

FEATURES:

- Chrome on metal finish



SINGLE DECK WASHDOWN TAP
005996

Single tap with threaded outlet, suit washing machine or where a hose is to be connected.

FEATURES:

- Chrome on metal finish



HOT AND COLD BASIN MIXER
005993

This faucet features hot and cold mixer taps, complete with high rise 200mm swivel spout to allow easy filling of jugs and kettles.

FEATURES:

- Chrome on metal finish.
- Model: MG3100



SINGLE FOLDING FAUCET
005990

Single folding faucet - when folded body is 39mm high.

FEATURES:

- Chrome finish



SINGLE FAUCET - LEFT HAND LESS UNION

005904 LEFT HAND
005895 - RIGHT HAND

Requires barb to take 12mm hose.



HOT AND COLD BASIN MIXING FAUCET
005910

Hot and cold mixer set with 90mm centre basin mixing faucet.

SPECIFICATIONS:

- Requires barb to take 12mm hose.
- Chrome



WHALE TUCKAWAY FAUCET ON/OFF SWITCH

005939 - STANDARD
005938 - WITH ON/OFF SWITCH

This faucet fits onto the vertical side of the sink bowl and folds down neatly for storage within the sink. Simply drill a hole into the side of the sink and pass through the thread with rubber seal from the front.

- Rear screws on, providing a two stage hose barb to suit 3/8" or 1/2" hose

TAPWARE



ELECTRIC 12V ROTATING FAUCET
005958

Plastic rotating faucet with built in 12V switch designed for use with a water pump or pressure reducing city water entry.

FEATURES:

- Folds down and is ideal for slide out camper trailer kitchens
- White



BARWIG SINGLE FAUCET AND SWITCH
005953 - 052 FAUCET AND SWITCH
005954 - 0552 FAUCET NO SWITCH

SPECIFICATIONS:

- Maximum Inlet Pressure: 35psi



WHALE TELESCOPIC FAUCET
005937

Mainly used with foot pumps, the telescopic outlet swivels through 360 degrees and can be pushed down when not in use.

FEATURES:

- Great space saver



SHOWER SET - WHITE
043604

Includes shower head, adjustable pole, soap holder and mixer taps.



TRIGGER SHOWER SET
005857

This trigger shower set has a heavy duty chrome finish. On/off trigger incorporated in handle. Wall bracket to suit (refer code 005872).

- White



TRIGGER SHOWER SET
043267

On/off trigger incorporated in handle. Chrome hose 1.5m.

- White/chrome



SHOWER WITH ADJUSTABLE FLOW RATE/HOSE ELBOW
005869

This elbow shower set comes complete with adjustable flow rate nozzle. Heavy duty construction.

FEATURES:

- Heavy duty chrome finish
- Includes adjustable flow rate nozzle
- Wall bracket to suit - refer code 005872

SPECIFICATIONS:

- Hose: 1.5m length
- Chrome



CAMEC SHOWER WALL MIXER
041678

Shower wall mixer 40mm cartridge.

FEATURES:

- WELS rated complies Australian/NZ standard AS/NZS 6400
- 405mm cartridge



SHOWER SET WITH SLIDING BAR
005882

Includes double lock flexible hose and soap holder.

SPECIFICATIONS:

- Sliding Bar - 690mm length
- Brass double lock
- Flexible hose



RECESS EXTERNAL WALL SHOWER

- 005810 SHOWER KIT WHITE
- 042898 SHOWER KIT BLACK
- 005833 HANDHELD SHOWER ROSE AND BRACKET WHITE
- 005832 REPLACEMENT HOSE WHITE
- 044458 RECESSED WALL SHOWER KEY

Suitable for external recessed wall types, annexes, shower tents, etc. with keyed lock security.

FEATURES:

- Fade and impact resistant, UV stabilised and can be painted
- Unit screws into the cut-out from the outside face - screws are covered when door is closed
- Hot and cold pipes connect at the rear to 1/2" BSP male water pipe fitting. Same goes for the shower rose connections
- On/off switch on shower rose
- Shower rose can be either hand held or bracketed to door

SPECIFICATIONS:

- Cut-Out Size: 155mm x 280mm (w)
- Can be installed either horizontally or vertically
- Extends outside just 12-15mm
- 120mm from mounting inside to end of threads



LOCKABLE BUDGET EXTERNAL SHOWER BOXES

- 043191 WHITE
- 043192 BLACK

FEATURES:

- Neat appearance in black or white to match your RV design
- Lock for security
- UV stabilised plastics designed for outdoor installation
- Requires cavity behind the box for hose to push back into
- On/off button on the hand sprayer
- Hook on the inside of the door to hang the hand sprayer
- Connections and taps for hot and cold water hook up



SHOWER MIXER ONLY SOLID HANDLE

- 005862
- Chrome



SHOWER BOX WITH HOT COLD MIXER PULL OUT PUSH BUTTON

- 005822

A compact shower with a long hose.

SPECIFICATIONS:

- Dimensions: 180mm(l) x 130mm(h) x 325mm(d)
- 4m hose
- White



HOT AND COLD SHOWER MIXER ONLY - CHROME WITH CRYSTAL HANDLES


- 005861
- To suit hand held showers.
- Chrome
- 3/8 MBSP connections.



SHOWER HOSE 1.5M

- 005870
- Hose to suit elbow shower set (refer code 005869).

TAPWARE

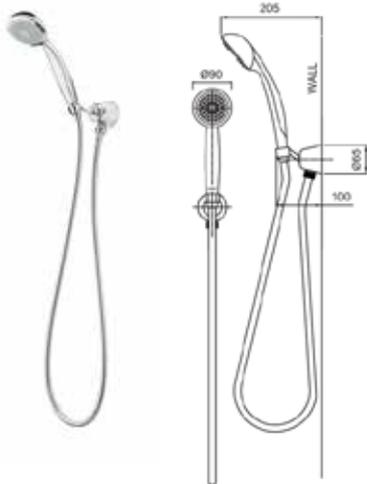

AURORA HAND SHOWER - WATERMARKED

044188

- Chrome
- 25 year warranty



WALL BRACKET

005872

Bracket to suit trigger and elbow shower set.

- Ch



CARTRIDGE KIT FOR CATALINA EXTERNAL SHOWER

043444

Includes 2 cartridges, springs and washers.



SOAP DISPENSERS

042872

SINGLE

042873

DOUBLE

400ml dispenser available as an individual unit or double bracket. Backing plate is fixed to the wall with screws (provided) or silicone, etc. and dispensers are removable. For hand soap, dish washing liquid, shampoo and body wash. Use in the caravan bathroom or kitchen. If the button is held in, soap will continue to flow until it is released. Colour is white with clear panels so that you can see when to re-fill.



BERMUDA HAND SHOWER - WATERMARKED

044191

- 25 year warranty



CARTRIDGE 330/804 MIXER - COURSE

005829

Replacement cartridge valve to suit hot and cold mixer (refer code 005824).



BRASS MAINS PRESS A-FRAME TAP

005975



BATHROOM ACCESSORY SETS

002109

FEATURES:

Set of 6. Includes: soap dish holder, toilet roll holder, towel rail, towel ring, glass tumbler and holder.

- Chrome



METAL FOLDING HOT/COLD WATER MIXER TAP SUIT CRAMER

043526

FEATURES:

- Solid chrome on brass construction
- Hot/Cold mixer
- Fold down tap
- Low profile to suit the Dometic/Cramer sinks with fold down lid
- Supplied with flexible hoses. Hose input is 1/2 inch male BSP thread

SPECIFICATIONS:

- Suits 40mm hole cut out
- Minimum height required above mounting base = 25mm
- 160mm spout from pivot point to end of spout
- 45mm in height from bench/sink top.
- Female 1/2 inch BSP thread on Hot & Cold connectors



THROUGH BULKHEAD ELBOW CONNECTOR

005874

This fitting is used to connect hand shower sets where installation is required through wall fixing.

FEATURES:

- Heavy duty chrome finish
- This elbow fits the CAMEC shower and trigger shower hose
- 3/8" BSP through wall and outlet suits chrome flexible shower hose, which is also 3/8" BSP
- Chrome



BRASS UNION 1/2" BSP X 3/8" FEMALE WITH WASHER

005951

Water adaptor, female 3/8" BSP to 12.5mm barb. Clamp your 12mm hose to one end the other end screws onto a male 3/8" BSP thread.

SUPER SUCTION

- 039885 - TOILET ROLL HOLDER CHROME
- 039887 - STORAGE HOOK CHROME
- 039888 - HOOK 3KG WHITE
- 039889 - TOWEL RING CHROME
- 039890 - SOAP DISH CHROME
- 039891 - 3 IN ONE BASKET CHROME

Instantly transform a room with an affordable premium suction product. Ideal for homes, motorhomes, caravans and offices.

FEATURES:

- Super suction
- One step installation
- Removable
- Press button action
- Chrome painted ABS plastic

SPECIFICATIONS:

- Weight Load: 3kg



BATHROOM MODULES



Classic Cabinet

CLASSIC CABINET

002120

White cabinet section only constructed from ABS plastic. Strong, durable and easy to clean. Compatible width with Thetford 400 series toilet.

SPECIFICATIONS:

- Dimensions: 668mm(l) x 555mm(w) x 500mm(d)
- White



CLEO BASIN TIP UP

040835

An ideal vanity sink unit for caravan, boat and motorhome bathrooms with limited free space. The Cleo tip up sink/folding vanity basin features an integrated soap and toothbrush holder and a simple lift out basin.




SHOWER TRAY DELUXE

035579

Deluxe shower tray with a non-slip base.

SPECIFICATIONS:

- Dimensions: 1010mm(l) x 75mm(h) x 683mm(d)
- Weight: 2.2kg
- Waste: 50mm



Foldaway Basin

CLASSIC BASIN FOLD UP

033523

Space saving fold-away, self draining basin constructed from ABS plastic. Strong, durable, easy to clean. Compatible with Thetford cassette toilet.

SPECIFICATIONS:

- Dimensions: 810mm(l) x 668mm(h) x 500mm(d)
- To suit 400 Series cassette
- Basin section only



CLEO BATHROOM CABINET WITH SLIDING MIRROR

040836

044104

MIRRORS AND

BUTTON

Featuring twin mirror sliding doors complete with a travel lock to ensure the cabinet remains secure whilst on the road. The Cleo vanity cabinet comes with retaining bars as well as a handy accessories shelf.



ABS ACRYLIC SHOWER TRAY

002165


Acrylic shower tray. Slightly raised section at one end where a portable toilet can sit.

FEATURES:

- Prior to fitting, it is essential to pack up the raised section, from underneath, to prevent damage during use
- Drill floor waste at any location
- Plug outlet and waste not included

SPECIFICATIONS:

- Dimensions: 965mm(l) x 585mm(w) x 125mm(d)
- Weight: 1.7kg
- White



VT90 SHOWER TRAY

002166

High gloss, ABS, shower tray.

SPECIFICATIONS:

- Dimensions: 830mm(l) x 670mm(h) x 55mm(d)
- White

GAS COMPLIANCE AND SAFETY



GAS DETECTOR SAFE-T-ALERT 12V
000342

Gas detector Safe-T-Alert 12V suitable for LPG and natural gas.

FEATURES:

- Draws 46 MA and is simple to operate
- When the test switch is activated a complete diagnostic test is performed
- The detector is fully operational from 6 to 16V DC, providing continuous operation
- Required 12V permanent connection



METAL GAS INSTRUCTION PLATE (MARINE)
003870

Metal gas instruction plate with consumer instructions for fixing to marine craft.

SPECIFICATIONS:

- Dimensions: 100mm(l) x 90mm(h) x 2mm(d)
- Pack of 2 different pieces



LPG CONSUMER INSTRUCTION PLATES (CARAVAN)
003869

Metal gas instruction plate with consumer instructions for fixing to caravans

SPECIFICATIONS:

- Dimensions: 100mm(l) x 100mm(h) x 1mm(d)
- Pack of 2 different pieces

This vent must remain unrestricted to provide ventilation when LP Gas appliances are in use

GAS VENT VENTILATION DECAL
043380

White with black writing.

WARNING
Ensure ventilation when the
Cooker is in use.
Do not use for space heating.

GAS VENTILATION DECAL
043381

White with black writing.



GAS COMPLIANCE DECAL

- 003875 NO. 3 - NEAR STOVE
- 003877 NO. 5 - BOOT LID
- 003878 NO. 6 - EVACUATION

Consumer instructions for fixing to caravans/ marine craft.



GAS TEST POINT 3/8IN
003910

This test point is located immediately downstream from the regulator. It allows the user to easily test that gas is coming through the regulator and that it is at reduced pressure.

FEATURES:

- May be used with flared nut ID-601 for 3/8" pipe

SPECIFICATIONS:

- Inlet is from regulator - 3/8" male BSP
- Outlet is 3/8" SAE male flare



GAS PRESSURE TEST POINT
003909

This test point is located immediately downstream from the regulator. It allows the user to easily test that gas is coming through the regulator and that it is at reduced pressure.

SPECIFICATIONS:

- 5/16" SAE Male x 3/8" BSPT Male
- Inlet: 3/8" - screws into regulator
- Outlet: 5/16" SAE Male flare



CHROME FLOOR MOUNT X 1/2" FEMALE BSP
004051

To suit low pressure appliances such as barbecues and flueless space heaters. For floor or wall mount.

FEATURES:

- Chrome plated
- Dust cap
- Mounting screws x 2

SPECIFICATIONS:

- Connection: 1/2" female
- Maximum Inlet Pressure: 7kPa
- Chrome



COPPER TUBE

- 003950 1/4" 50M ROLL
- 003952 5/16" 30M ROLL
- 003954 3/8" 18M ROLL

Annealed copper tube suitable for gas installations.



YELLOW 12MM THREAD SEAL GAS TAPE (10M)
004063

Used on threaded joins on gas pipe.

- Yellow



NO 6 FLARE NUT AE

- 003966 - 1/4" MALE SAE
- 003967 - 5/16" MALE SAE
- 003968 - 3/8" MALE SAE
- 003970 - 1/2" FEMALE SAE
- 003973 - RED 3/8" FEMALE SAE X 5/16" TUBE
- 003974 - RED 1/2" FEMALE SAE X 3/8" TUBE

Flare nuts are placed over the copper pipe prior to using the FLARE tool.



SADDLES

Used to secure copper tube to the chassis.

COPPER

- 003959 - 5/16" - 7.95MM TUBE
- 003960 - 3/8" - 9.52MM TUBE
- 003961 - 1/2" - 12.7MM TUBE

PLASTIC

- 042642 - 13MM
- 042656 - 19MM



BALL VALVES

- 004043 - 1/4"FBSP X 1/4"FBSP
- 004046 - 5/16"SAE AND NUTS
- 004047 - 3/8"BSPT AND NUTS
- 004048 - 3/8"SAE AND NUTS



COMPANION FEMALE 3/8" LEFT HAND THREAD X FEMALE POL

004054



GF5 ADAPTOR GAS FITTING
050044

GF5 adaptor gas fitting adaptor 1/4 BSPF x 3/8 male sae for BBQ and ring burners.

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.

GAS FITTINGS AND ADAPTORS



ELBOW 3/8" LEFT HAND THREAD
004056 - 3/8" MBSP X POL MALE LH R ANGLE
004059 - 3/8" FLH BSP X FEMALE POL



NO 8 ELBOW
003992 - 3/8" MALE SAE X 1/4" MALE BSP
003989 - 5/16" MALE SAE X 1/4" MALE BSP
003990 - 5/16" MALE SAE X 3/8" MALE BSP



NO 25 EXTRUDED ELBOW
036532 - 3/8" MALE BSP X 3/8" FEMALE BSP
004018 - 1/4" MALE BSP X 1/4" FEMALE BSP

NO 38 SINGLE UNION BODY
036542 - 5/16" MALE BSP X 1/8" MALE BSP
036544 - N5/16" MALE SAE X 3/8" MALE SAE
036543 - 5/16" MALE SAE X 1/4" MALE SAE
036546 5/16 X 3/8 M/F



NO 56 FLARE CAP NUT
004029 - 5/16" FEMALE FLARE SAE



NO 72 ADAPTOR
036553 - 3/8" FEMALE BSP X 1/4" MALE BSP
036552 - 1/4" FEMALE BSP X 1/4" MALE BSP
036554 - 1/2" FEMALE BSP X 1/4" MALE BSP
036555 - 1/2" FEMALE BSP X 3/8" MALE BSP



NO 16 FEMALE UNION
004001 3/8" MALE SAE X 3/8" FEMALE BSP
004000 3/8" MALE SAE X 1/4" FEMALE BSP
004002 3/8" MALE SAE X 1/2" FEMALE BSP
003995 1/4" MALE SAE X 1/4" FEMALE BSP
004003 1/2" MALE SAE X 3/8" FEMALE BSP
003997 5/16" MALE SAE X 1/4" FEMALE BSP



NO 17 DOUBLE UNION
004004 - 1/4" MALE SAE X 1/4" MALE SAE
004006 - 3/8" MALE SAE X 3/8" MALE SAE
004005 - 5/16" MALE SAE X 5/16" MALE SAE
004007 - 5/16" MALE SAE X 1/4" MALE SAE



NO 27 HEXAGON NIPPLE 1/4" X 1/4"
004020 - 1/4" MALE BSP X 1/4" MALE BSP



NO 62 - 1/4" MALE BSP X 1/4" FEMALE UNION
004033

Used to convert copper pigtailed with dual/changeover regulators. For use with single OPP regulators less POL.

SPECIFICATIONS:

- Female Union 1/4" Male BSPT Inverted Flare 1/4"



NO 65 FLARE PLUG
004035 - 5/16" FEMALE FLARE SAE
004036 - 3/8" MALE SAE



NO 73 REDUCING NIPPLE
004041 - 3/8" MALE BSP X 1/4" MALE BSP
036556 - 1/4" X 1/8"



NO 7 UNION
003981 3/8" MALE SAE X 1/8" MALE BSP
003983 3/8" MALE SAE X 3/8" MALE BSP
003982 3/8" MALE SAE X 1/4" MALE BSP
003984 3/8" MALE SAE X 1/2" MALE BSP
003976 1/4" MALE SAE X 3/8" MALE BSP
003977 5/16" MALE SAE X 1/8" MALE BSP
003979 5/16" MALE SAE X 3/8" MALE BSP
003980 5/16" MALE SAE X 1/2" MALE BSP



NO 24 REDUCING BUSH
036529 - 3/8" FEMALE BSP X 1/4" MALE BSP
036530 - 1/2" FEMALE BSP X 1/4" MALE BSP
036531 - 1/2" FEMALE BSP X 3/8" MALE BSP



NO 36 FEMALE UNION ELBOW
004028 - 3/8" MALE SAE X 3/8" FEMALE BSP
036541 - 5/16" MALE SAE X 1/4" FEMALE BSP



NO 39 DOUBLE UNION BODY
036547 5/16" X 5/16IN



NO 70 FLARE SWIVEL
004038 - 3/8" FEMALE SAE X 3/8" FEMALE SAE
004037 - 5/16" FEMALE SAE X 5/16" FEMALE SAE



GAS ADAPTOR 1/2" MALE BSP X 5/16" SAE MALE FLARE
042580

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.



ADAPTOR STRAIGHT 3/8" LEFT HAND
035715

Adaptors to suit 3/8" BSP left hand cylinders.

SPECIFICATIONS:

- 3/8" left hand Male x 1/4" Female BSP



GAS CYLINDER VALVE SAFETY PLUG ONLY POL
036513

Prevents accidental leaks and hazards during transportation of cylinder or when not in use.



GF12 ADAPTOR GAS FITTING
050045

Quick action connect 3/8 SAEF x 3/8 SAEM QC80



ADAPTOR MALE POL TO 1/4" MALE BSP
035719

Adaptors to suit POL cylinders.

SPECIFICATIONS:

- Male POL to 1/4" Male BSP



ADAPTOR 9KG BOTTOM TO 3/8" LEFT HAND COMPANION
035722

Adaptor that fits into a 4.5 or 9kg gas bottle and allows 3/8 left hand thread to connect.



NO 18 DOUBLE ELBOW

004011 - 3/8" MALE SAE X 3/8" MALE SAE

004010 - 5/16" MALE SAE X 5/16" MALE SAE



MALE BAYONET FITTING

033800

Low pressure appliance hose adaptor.

FEATURES:

- Dust cap
- Brass



ADAPTOR 3/8" LEFT HAND FEMALE TO 1/4" BSP MALE

035714

Adaptors to suit 3/8" BSP left hand cylinders.



GAS BAYONET DUST CAP

043382




NO 19 3-WAY

004014 - NO19 3-WAY TEE 3/8 SAE

004013 - NO19 3-WAY TEE 5/16 SAE

GAS HOSE PVC

036512	300MM	1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP
003944	600MM	1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP
036509	1800MM	1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP
036508	2400MM	1/4" F INV FLARE BSP X 1/4" F INV FLARE BSP
003920	600MM	3/8" F FLARE SAE X 3/8" F FLARE SAE
003924	1200MM	3/8" F FLARE SAE X 3/8" F FLARE SAE
003919	1800MM	3/8" MALE BSP X 3/8" F FLARE SAE
036510	900MM	3/8" MALE BSP X 1/4" F BSP INV FLARE
003935	1200MM	3/8" MALE BSP X 1/4" F BSP INV FLARE



CODE 003930

003937	1500MM	3/8" MALE BSP X 1/4" F BSP INV FLARE
003911	300MM	3/8" MALE FLARE SAE X 3/8" MALE BSP
003912	450MM	3/8" MALE FLARE SAE X 3/8" MALE BSP
003913	600MM	3/8" MALE FLARE SAE X 3/8" MALE BSP
003927	300MM	5/16" MALE FLARE SAE X 3/8" MALE BSP
003928	450MM	5/16" MALE FLARE SAE X 3/8" MALE BSP
003929	600MM	5/16" MALE FLARE SAE X 3/8" MALE BSP
003930	600MM	5/16" F FLARE SAE X 5/16" F FLARE SAE
003931	1200MM	5/16" F FLARE SAE X 5/16" F FLARE SAE



CODE 003927



GAS FUSE SAFETY VALVE

044813

Gasfuse safety devices are available for LPG gas bottles and are ideal for household barbecues, patio heaters, caravans, boating and camping applications and are available in both POL and 3/8th fittings

SPECIFICATIONS:

- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.

GAS CYLINDERS AND ACCESSORIES



GAS CYLINDERS

- 040408 - 9KG POL NO GAUGE CAMEC
- 003860 - 9KG GALV AND POL NO GAUGE
- 003852 - 4.5KG C/W POL-TALL
- 041778 - 4.5KG C/W POL-TALL
- 003853 - 4KG C/W POL-SQUAT
- 003861 - 4KG GALV AND POL NO GAUGE
- 003857- 2KG 3/8 L/H THREAD
- 003856 - 1.25KG 3/8 L/H THREAD

FEATURES:

- AGA approved
- Class 2 gas cylinders are specifically coated making them suitable for recreational vehicles, and general use



GAS DOOR FOR GALVANISED BOX (003830)

Available with left or right hand hinge in smooth or stucco white. Lockable - includes 2 keys.

- 003835 LHH SMW WHITE
- 003837 RHH SMW WHITE
- 003831 ILL



GAS BOX GALVANISED

003830

To suit 9kg gas cylinder. Mostly used in small motorhome conversions.

FEATURES:

- Prefabricated sealed compartment
- Lockable door available (not included)
- Gas cylinder not included

SPECIFICATIONS:

- Dimensions: 360mm(w) x 505mm(h) x 360mm(d)



GAS HOSE STAINLESS STEEL SINGLE REGULATOR FLEXIBLE PIGTAIL EXCESS FLOW

- 003906 450MM 1/4" MALE NPT X POL
- 038300 600MM 1/4" MALE NPT X POL

Replacement for PVC pigtail.

FEATURES:

- AGA approved

SPECIFICATIONS:

- 1/4" Male NPT
- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C



GAS HOSE STAINLESS STEEL DOUBLE REGULATOR EXCESS FLOW

- 003899 - 450MM 7/16" INV FLARE X POL

Replacement for copper pigtail.

FEATURES:

- AGA approved
- Flexible pigtail

SPECIFICATIONS:

- 450mm x 7/16" inverted flare
- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C



ADJUSTABLE FRONT OPENING SMALL GAS BOTTLE HOLDER

050030 - SMALL

050031 - LARGE

SMALL - Front opening suits 4kg gas bottle zinc plate weld on 1.38kg. To used with camper trailers and other situations where there is limited access.

LARGE - Front opening suits 9kg gas bottle zinc plate weld on 2kg. To used with camper trailers and other situations where there is limited access.



GAS HOSE 1200 BRAID X 5/16" MALE

003932

SPECIFICATIONS:

- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C



GAS HOSE STAINLESS STEEL SINGLE REGULATOR FLEXIBLE EXCESS FLOW

- 003905 - 450MM H/WHEEL 1/4" MALE NPT X H/WHEEL POL
- 036518- 600MM H/WHEEL 1/4" MALE NPT X H/WHEEL POL

Maximum Working Pressure: 2600kPa

- Working Temperature Range: -20°C to +65°C



GAS CYLINDER CRADLE UNIVERSAL, EXTRA STRONG BASE.

003829 - 9KG PLATED - ADJUSTABLE CLAMP

039073 - CRADLE

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.



MANUAL CHANGEOVER GAS VALVE
043464

Easily switch between cylinders. Replacement manifold for twin cylinder regulator set ups.



GAS DOUBLE REGULATOR AUTO AND COPPER PIGTAIL
003895

Adjustable LPG regulator, dual stage for RV installations.

FEATURES:

- Complete with copper pigtails (450mm) x 2, bracket and fixing screws

SPECIFICATIONS:

- Automatic changeover
- Capacity: 200mj/hr - 4kg/hr
- Inlet: 7/16" NPT
- Outlet: 3/8" NPT



GAS REGULATOR SINGLE-STRAIGHT POL
003884

036523 REPLACEMENT SOFT NOSE CONE

Straight adjustable soft nose regulator. Not for RV use

SPECIFICATIONS:

- Capacity: 175mj/hr - 3.5kg/hr
- Inlet: POL
- Outlet: 3/8" NPT



GAS BAYONET HOSE

- 002920 - 1.2M BAYONET X 1/4" BSPF
- 002914 - 1.5M BAYONET X 1/4" BSPF
- 002913 - 2.0M BAYONET X 1/4" BSPF

SPECIFICATIONS:

- Class B
- Maximum Working Pressure: 7 kPa
- Working Temperature Range: -20°C to +125°C



MARSHALL SINGLE REGULATOR OPP 190MJ

- 042050 190MJ
- 042051 290MJ

This two stage regulator combines both a high pressure first stage and a low pressure second stage regulator into a single unit. Ideal for RV applications to ensure a smooth and continuous flow.

SPECIFICATIONS:

- Inlet Pressure: 100psi
- Outlet Pressure: 9" W.C
- Inlet: 1/4" NPT FEM



SINGLE REGULATOR WITH OVER PRESSURE PROTECTION NO POL
6060521

036520

Non adjustable regulator for RV installations only.

FEATURES:

- Includes 1/4" inverted flare adaptor, bracket and fixing screws

SPECIFICATIONS:

- Capacity: 160mj/hr - 3.2kg/hr
- Inlet: 1/4" NPT
- Outlet: 3/8" NPT



PIGTAIL COPPER POL

036517 - 460MM (7/16" MALE INV FLAREF POL)

003897 - 762MM (30")

SPECIFICATIONS:

- Not suitable for single cylinder installations
- POL x 7/16" inverted flare suits most applications
- Class C
- Maximum Working Pressure: 2600kPa



GAS CYLINDER GAUGE ACCU-LEVEL MAGNETIC STRIP GAUGE
003868

FEATURES:

- To activate, pour hot water down the heat sensitive strip
- Reusable magnetic strip



GAS REGULATOR OPP MANUAL DUAL AND BRACKET

003892

Non adjustable regulator for RV installations only.

FEATURES:

- Dual stage
- Complete with bracket and fixing screws

SPECIFICATIONS:

- Manual changeover
- Capacity: 160mj/hr - 3.2kg/hr
- Inlet: 7/16" FNPT x 2
- Outlet: 3/8" NPT



REGULATOR AND HOSE KIT 1.8M
036519

Suitable for BBQs and gas camping fridges.

SPECIFICATIONS:

- Length: 1.8m x 8mm (diam)
- Capacity: 2kg/hr
- Hose type: PVC 8mm ID
- Inlet: POL
- Outlet: 1/4" BSPF



GAS HOSE STAINLESS STEEL DOUBLE REGULATOR EXCESS FLOW

003902

SPECIFICATIONS:

- 450mm x 7/16" inverted flare with hand wheel
- Class C
- Maximum Working Pressure: 2600kPa
- Working Temperature Range: -20°C to +65°C

Note: BSP fittings require thread tape. Always test for leaks after working on any gas fittings.